

## Datasheet - TV4H 017-31Y



Position switch / medium heavy Position switch / Product series 015, 016, 017 - Metal enclosure / 017 / 017 Spring rod lever on shaft 4H



- Metal enclosure
- 4 Contacts
- 67 mm x 130 mm x 43 mm ( basic component)
- Actuator head can be repositioned in steps 4 x 90°
- Continuous adjustment of lever position 360°
- Lever can be transposed by 180°
- Elasticity of spring allows for inexact movement of actuator
- 3 Cable entry M 20 x 1.5

(Minor differences between the printed image and the original product may exist!)

### Ordering details

|                          |              |
|--------------------------|--------------|
| Product type description | TV4H 017-31Y |
| Article number           | 101060387    |
| EAN Code                 |              |
| eCl@ss                   | 27-27-06-01  |

### Approval

Approval



### Global Properties

|                                      |                                  |
|--------------------------------------|----------------------------------|
| Permanent light                      | 017 Federstabschwenkhebel 4H     |
| Standards                            | EN 60947-5-1                     |
| Compliance with the Directives (Y/N) | Yes                              |
| Suitable for safety functions (Y/N)  | No                               |
| Standard housing (Y/N)               | No                               |
| Materials                            |                                  |
| - Material of the housings           | light alloy die-casting, painted |
| - Material of the rod                | Metal film                       |
| - Material of the contacts           | Silver                           |

|                 |         |
|-----------------|---------|
| Housing coating | painted |
| Weight          | 540     |
| Slide form      |         |

## Mechanical data

---

|  |   |
|--|---|
| Design of electrical connection                              | Screw connection  |
| Cable section  |   |
| - Min. Cable section   | 1.5   |
| - Max. Cable section   | 2.5   |
| AWG-Number   | 13  |
| Active principle   | mechanical  |
| Mechanical life  | 5.000.000 operations  |
| notice   | All indications about the cable section are including the conductor ferrules. |
| Design of actuating element                                  | Rod lever   |
| actuating torque   | 25  |
| Bounce duration  |   |
| Switchover time  |   |
| Contact opening  | 2 x 2.5   |
| Actuating speed with vertical actuating angle to switch axis |   |
| - Min. Actuating speed                                       | 1   |
| - Max. Actuating speed                                       | 3   |
| - Actuating angle from left of switch axis                   | 30  |
| - Actuating angle from right of switch axis                  | 30  |

## Ambient conditions

---

|                                  |                      |
|----------------------------------|----------------------|
| Ambient temperature              |                      |
| - Min. environmental temperature | -30                  |
| - Max. environmental temperature | +90                  |
| Protection class                 | IP65 to IEC/EN 60529 |

## Electrical data

---


|                                |   |
|--------------------------------|---|
| Design of control element      | Normally open contact (NO), Opener (NC) |
| - with double break            |   |
| Switching principle            | Creep circuit element                   |
| - positive break NC contact    |   |
| Number of shutters             | 3                                       |
| Number of openers              | 1                                       |
| Rated insulation voltage $U_i$ | 500 V                                   |
| Thermal test current $I_{the}$ | 10 A                                    |
| Utilisation category           | AC-15: 400 V / 4 A                      |
| Max. fuse rating               | 20 A gG D-fuse                          |

## Dimensions






---

|                          |     |
|--------------------------|-----|
| Dimensions of the sensor |     |
| - Width of sensor        | 67  |
| - Height of sensor       | 356 |
| - Length of sensor       | 43  |
| Staff diameter           | 4   |

## Diagram



Note Diagram

-  positive break NC contact
-  active
-  no active
-  Normally-open contact
-  Normally-closed contact

**Ordering suffix**

The applicable ordering suffix is added at the end of the part number of the safety switch.  
 Order example: TV4H 017-31Y- C

|           |   |
|-----------|---|
| ...- C    | Magnetic blow-out<br>Blow-out magnets available to switch high DC currents<br>Rated operating current/voltage I <sub>e</sub> /U <sub>e</sub> : 1 A / 220 V; 4 A / 24 V<br>Utilisation category: DC-13 |
| ...- H    | Slow action with staggered contacts   |
| ...- UE   | Slow action with overlapping contacts   |
| ...- 1164 | Splined shaft and lever available with 10° toothing   |

**Ordering code**

(1)(2) 017-(3)Y-(4)

|   |  |
|---|--|
| (1)<br>T<br>M   | Slow action<br>Snap action   |
| (2)<br>S<br>2S<br>K<br>2K<br>3K<br>8H<br>7H<br>10H<br>H<br>4H<br>2H<br>3H<br>9H<br>6H | Plunger S<br>Telescopic plunger 2S<br>Offset roller lever K<br>Rocking offset roller lever 2K<br>Angle roller lever 3K<br>Roller lever 8H<br>Roller lever 7H<br>Rod lever 10H<br>Roller lever H<br>Spring rod lever on shaft 4H<br>Leaf-spring lever 2H<br>Roller lever 3H<br>Rod lever 9H<br>Leaf-spring lever 6H |

|            |  |
|------------|--|
| <b>(3)</b> |  |
| <b>22</b>  | 2 Normally open contact (NO) / 2 Opener (NC) |
| <b>13</b>  | 1 Normally open contact (NO) / 3 Opener (NC) |
| <b>31</b>  | 3 Normally open contact (NO) / 1 Opener (NC) |
| <b>(4)</b> |  |
| <b>UE</b>  | Slow action with overlapping contacts        |
| <b>H</b>   | Slow action with staggered contacts          |
| <b>C</b>   | Magnetic blow-out                            |

## Documents

---

**Operating instructions and Declaration of conformity** (nl) 95 kB, 20.07.2018

Code: mrlk\_posi-allgemein\_nl

**Operating instructions and Declaration of conformity** (ru) 133 kB, 09.07.2018

Code: mrlk\_posi-allgemein\_ru

**Operating instructions and Declaration of conformity** (es) 88 kB, 09.07.2018

Code: mrlk\_posi-allgemein\_es

**Operating instructions and Declaration of conformity** (en) 86 kB, 09.07.2018

Code: mrlk\_posi-allgemein\_en

**Operating instructions and Declaration of conformity** (cn) 138 kB, 09.07.2018

Code: mrlk\_posi-allgemein\_cn

**Operating instructions and Declaration of conformity** (it) 86 kB, 09.07.2018

Code: mrlk\_posi-allgemein\_it

**Operating instructions and Declaration of conformity** (jp) 285 kB, 09.07.2018

Code: mrlk\_posi-allgemein\_jp

**Operating instructions and Declaration of conformity** (pl) 118 kB, 09.07.2018

Code: mrlk\_posi-allgemein\_pl

**Operating instructions and Declaration of conformity** (fr) 85 kB, 09.07.2018

Code: mrlk\_posi-allgemein\_fr

**Operating instructions and Declaration of conformity** (pt) 86 kB, 09.07.2018

Code: mrlk\_posi-allgemein\_pt

**Operating instructions and Declaration of conformity** (de) 88 kB, 09.07.2018

Code: mrlk\_posi-allgemein\_de

**Declaration of conformity** (de) 93 kB, 27.03.2017

Code: konfi\_mrl\_tm015\_de

**Declaration of conformity** (en) 91 kB, 07.11.2017

Code: konfi\_mrl\_tm015\_en

**CCC certification** (en) 4 MB, 27.10.2017


Code: q\_372p02

**CCC certification** (cn) 4 MB, 27.10.2017

Code: q\_372p03


## Images

---

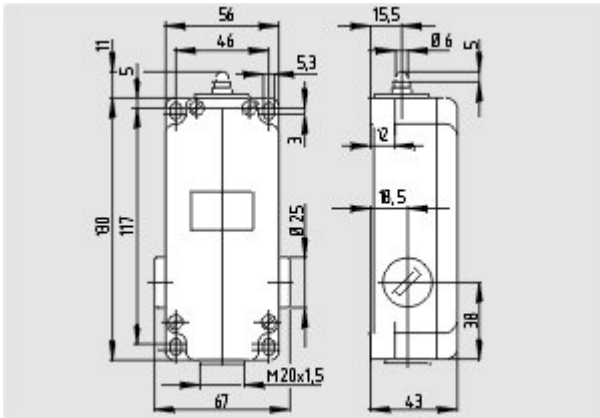


Dimensional drawing (basic component)

---

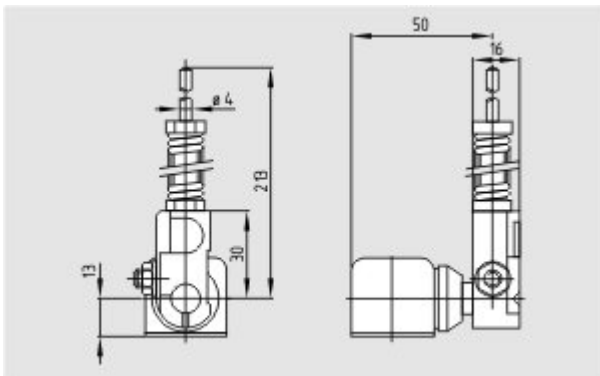

Dimensional drawing (miscellaneous)

---

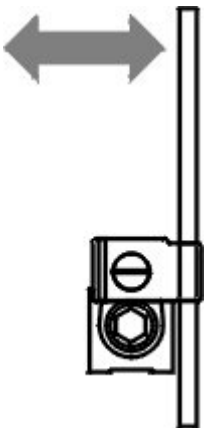

Operating principle

---