
Datasheet - AZM 161-STS30-07

Solenoid interlock / AZM 161 / Door-handle system STS / AZM 161-STS30



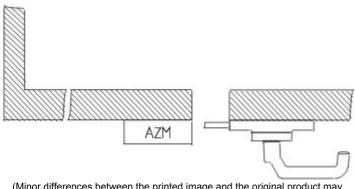

(Minor differences between the printed image and the original product may exist!)

- Latching handle
- · Suitable for all types of guard
- suitable in combination with EX-AZM 161
- Max. 110 °C

Ordering details

Product type description AZM 161-STS30-07

 Article number
 101173764

 EAN Code
 4030661302966

 eCl@ss
 27-27-92-16

Global Properties

Permanent light AZM 161-STS30

Weight 1530

Mechanical data

emergency handle (Y/N) No
Shearing force 15.000 N
Actuator mounted outside

Door hinge right

Included in delivery

Mounting plate for safety switch Actuator including mounting plate

Documents

Operating instructions and Declaration of conformity (es) 480 kB, 24.09.2018

Code: mrl_az-azm-sts30_es

Operating instructions and Declaration of conformity (it) 480 kB, 24.09.2018

Code: mrl_az-azm-sts30_it

Operating instructions and Declaration of conformity (de) 482 kB, 24.09.2018

Code: mrl az-azm-sts30 de

Operating instructions and Declaration of conformity (fr) 481 kB, 24.09.2018

Code: mrl_az-azm-sts30_fr

Operating instructions and Declaration of conformity (cn) 571 kB, 24.09.2018

Code: mrl_az-azm-sts30_cn

Operating instructions and Declaration of conformity (da) 555 kB, 26.01.2012

Code: mrl_az-azm-sts30_da

Operating instructions and Declaration of conformity (pl) 525 kB, 24.09.2018

Code: mrl_az-azm-sts30_pl

Operating instructions and Declaration of conformity (jp) 576 kB, 24.09.2018

Code: mrl_az-azm-sts30_jp

Operating instructions and Declaration of conformity (pt) 481 kB, 24.09.2018

Code: mrl_az-azm-sts30_pt

Operating instructions and Declaration of conformity (en) 495 kB, 24.09.2018

Code: mrl_az-azm-sts30_en


Operating instructions and Declaration of conformity (nl) 480 kB, 24.09.2018

Code: mrl_az-azm-sts30_nl

Images



Product photo



Dimensional drawing (miscellaneous)

System components

Accessories



1147878 - SZ 415-1

- Suitable for mounting inside and outside of the hazardous area
- To prevent inadvertent closing, e.g. during maintenance
- · For complex plant
- Prevents actuation of the switch
- · Lockout tag with 3 circular holes



1147932 - SZ 415-2

- Suitable for mounting inside and outside of the hazardous area
- To prevent inadvertent closing, e.g. during maintenance
- · For complex plant
- Prevents actuation of the switch
- · Lockout tag with 3 circular holes



SZ 415-1-2177 - SZ 415-1-2477

- Suitable for mounting inside and outside of the hazardous area
- To prevent inadvertent closing, e.g. during maintenance
- · For complex plant
- Prevents actuation of the switch
- Lockout tag with 5 circular holes



SZ 415-2-2177 - SZ 415-2-2477

- Suitable for mounting inside and outside of the hazardous area
- To prevent inadvertent closing, e.g. during maintenance
- For complex plant
- Prevents actuation of the switch
- · Lockout tag with 5 circular holes



101172607 - TFA-020

- Pre-positioning
- The actuator is independent from the centring device.
- · Smooth insertion or retraction of the actuator