

Datasheet - AZ/AZM 200-B1-LT

Solenoid interlock / AZM 200 / Actuator / AZ/AZM 200-B1

 Preferred typ

- Actuators with return spring
- Actuator for sliding guards
- Tolerates up to max. 5 mm overtravel

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	AZ/AZM 200-B1-LT
Article number	101183465
EAN Code	4030661321189
eCl@ss	27-27-06-05

Approval

Approval



notice

Certification in combination with the AZ/AZM 200

Global Properties

Permanent light	AZ/AZM 200-B1
actuating direction	left
Materials	
- Material of the housings	Grivory®
- Material of the actuator	zinc die-cast
Weight	285
Door detection sensor (Y/N)	Yes

Mechanical data

Mechanical life	≥ 1.000.000 operations
Emergency unlocking device (Y/N)	No
Clamping force F	2000 N

Dimensions

Dimensions of the actuators	
- Width of the actuator	84
- Height of the actuator	115
- Length of the actuator	50

Included in delivery

The safety switch / solenoid interlock and the actuator unit must be ordered separately.

Ordering code

AZ/AZM 200-B1-(1)T(2)

(1)

L	actuating direction left
R	actuating direction right

(2)

without	without Emergency exit
P0	with Emergency exit

Documents

Operating instructions (fr) 292 kB, 24.09.2018

Code: mrl_az-azm201-b1_fr

Operating instructions (cn) 414 kB, 23.11.2018

Code: mrl_az-azm201-b1_cn

Operating instructions (en) 272 kB, 24.09.2018

Code: mrl_az-azm201-b1_en

Operating instructions (es) 271 kB, 24.09.2018

Code: mrl_az-azm201-b1_es

Operating instructions (it) 289 kB, 24.09.2018

Code: mrl_az-azm201-b1_it

Operating instructions (pt) 293 kB, 24.09.2018

Code: mrl_az-azm201-b1_pt

Operating instructions (pl) 292 kB, 24.09.2018


Code: mrl_az-azm201-b1_pl

Operating instructions (de) 272 kB, 24.09.2018

Code: mrl_az-azm201-b1_de

Operating instructions (nl) 289 kB, 24.09.2018

Images

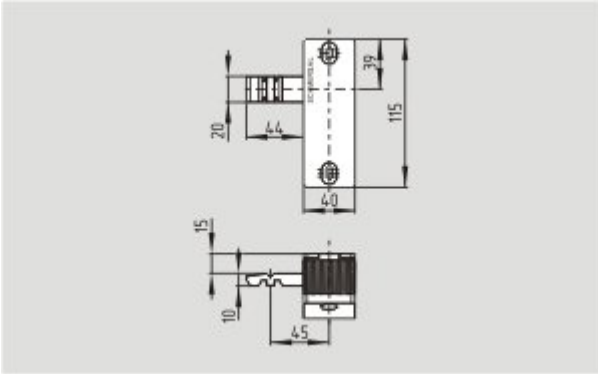

Dimensional drawing (miscellaneous)



Detail photo
