

Datasheet - AZ/AZM201-B1-RTP0

Solenoid interlock / AZM201 / Actuator / AZ/AZM201-B1



Preferred typ



- Actuators with return spring
- Actuator for sliding guards
- Tolerates up to max. 5 mm overtravel
- for right hinged doors
- with Emergency exit

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	AZ/AZM201-B1-RTP0
Article number	103013495
EAN Code	4030661493435
eCl@ss	27-27-06-05

Approval

Approval



notice

Certification in combination with the AZ/AZM201

Global Properties

Permanent light	AZ/AZM201-B1
actuating direction	right
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic
- Material of the actuator	zinc die-cast
Weight	290 g

Mechanical data

Mechanical life	≥ 1.000.000 operations
Emergency unlocking device (Y/N)	Yes
Clamping force	2000

Dimensions

Dimensions of the actuators	
- Width of the actuator	98 mm
- Height of the actuator	115 mm
- Length of the actuator	50 mm

Included in delivery

The safety switch / solenoid interlock and the actuator unit must be ordered separately.

Ordering code

AZ/AZM201-B1-(1)T(2)

(1)

L	actuating direction left
R	actuating direction right

(2)

<i>without</i>	without Emergency exit
P0	with Emergency exit

Documents

Operating instructions (fr) 292 kB, 24.09.2018

Code: mrl_az-azm201-b1_fr

Operating instructions (cn) 414 kB, 23.11.2018

Code: mrl_az-azm201-b1_cn

Operating instructions (en) 272 kB, 24.09.2018

Code: mrl_az-azm201-b1_en

Operating instructions (es) 271 kB, 24.09.2018

Code: mrl_az-azm201-b1_es

Operating instructions (it) 289 kB, 24.09.2018

Code: mrl_az-azm201-b1_it

Operating instructions (pt) 293 kB, 24.09.2018

Code: mrl_az-azm201-b1_pt

Operating instructions (pl) 292 kB, 24.09.2018

Code: mrl_az-azm201-b1_pl


Operating instructions (de) 272 kB, 24.09.2018

Code: mrl_az-azm201-b1_de

Operating instructions (nl) 289 kB, 24.09.2018

Code: mrl_az-azm201-b1_nl

Images

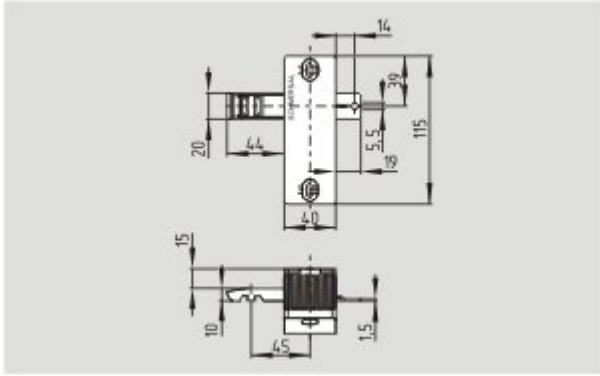

Dimensional drawing (miscellaneous)

System components

Product



AZM201

- Thermoplastic enclosure
 - RFID-technology for needs-based protection against tampering
 - Max. length of the sensor chain 200 m
 - Self-monitoring series-wiring of 31 sensors
 - 3 LEDs to show operating conditions
 - Sensor technology permits an offset between actuator and interlock of ± 5 mm vertically and ± 3 mm horizontally
 - Suitable for hinged and sliding guards
 - Intelligent diagnosis
 - Manual release
-

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 14:50:09h Kasbase 3.3.0.F.64I