

## Datasheet - SVM1/SR/X-6/Yoo/oo/E

Key transfer system / SVM1 - Key distribution station



(Minor differences between the printed image and the original product may exist!)

- coloured key heads
- Key-operated selector switch interlocking device with 6 keys

### Ordering details

Product type description	SVM1/SR/X-6/Yoo/oo/E
Article number	SVM1/SR/X-6/Yoo/oo/E
EAN Code	
notice	In the order/enquiry, the required key biting numbers "X" (primary cylinder), "Y" (secondary cylinder) and the colours "oo/oo" of the key heads for the secondary key must be indicated (e.g. SVM1/SR/111-6/222RT/WS/E)! If no lock number is indicated in the order/inquiry, we will supply a lock number at our discretion. The user must ensure that lock numbers are not assigned twice in a single plant (factory site)! The user must ensure that no double key bit numbers are allocated on one site (company site)!
eCl@ss	27-39-01-90

### Classification

Standards	EN ISO 13849-1
B10d Normally-closed contact (NC)	100.000
Mission time	20 Years
notice	$MTTF_d = \frac{B_{10d}}{0,1 \times n_{op}}$ $n_{op} = \frac{d_{ap} \times h_{op} \times 3600 \text{ s/h}}{t_{cycle}}$

### Global Properties

Permanent light	Schlüssel-Verteilstation
Standards	EN ISO 13849-1, EN 1088
Compliance with the Directives (Y/N)	Yes
Active principle	mechanical
Materials	
- Material of the housings	Stainless steel
- Locking bolt material	Brass
Housing coating	painted
- Enclosure color	Silver
Color	
- Colour of the key arip	oo/oo

- Brown (BR)
  - yellow (GB)
  - red (RT)
  - Blue (BL)
  - White (WS)
  - Grey (GR)
  - green (GN)
  - Black (SW)
- and all combinations resulting thereof

■ Silver

- Colour of the key	
Weight	1280
Key number	
- primary key	X
- secondary key	Y
Locking system	Included in standard version
Key	6
Recommended combinations	SHGV, SVE
Front plate mounting (Y/N)	Yes

### Mechanical data

---

Mechanical life	100.000 operations
Switching frequency	5

### Ambient conditions

---

Ambient temperature	
- Min. environmental temperature	-25
- Max. environmental temperature	+50
Protection class	IP40 to IEC/EN 60529

### ATEX

---

Explosion protection categories for gases	None
Explosion protected category for dusts	None

### Dimensions

---

Dimensions	
- Width	120
- Height	54.5
- Length	180

### Included in delivery

---

SVM with 6 secondary key and 6 emergency keys, without primary key

### notice - Operating principle

---

see drawing	Primary key in Pos. 2: primary key not withdrawable, secondary key withdrawable Primary key in Pos. 1: primary key withdrawable, secondary key not withdrawable
-------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------

### Ordering code

---

SVM1(1)(2)(3)-(4)(5)(6)/(7)

<b>notice</b>	<b>Not all variations can be supplied. The available order code used to convert the product part name.</b>
<b>(1)</b> without -Zl	Included in standard version Locking system Central locking system-Locking system
<b>(2)</b> without /SR	Included in standard version Silver coloured key heads
<b>(3)</b> X	Key number ( n) primary key 35 ... 99
<b>(4)</b> 6 10	6 secondary key 10 secondary key
<b>(5)</b> Y	Key number ( n) secondary key 100 ... 999
<b>(6)</b> oo/oo	Colour of the key grip ■ (BR) ■ (GB) ■ (RT) ■ (BL) ■ (WS) ■ (GR) ■ (GN) ■ (SW) and all combinations resulting thereof
<b>(7)</b> E A	Mounting plate Assembly housing

## Documents

---

**Operating instructions and Declaration of conformity (da)** 2 MB, 25.09.2015

Code: mrl\_shgv-sve-svm\_da

**Operating instructions and Declaration of conformity (es)** 2 MB, 22.08.2016

Code: mrl\_shgv-sve-svm\_es

**Operating instructions and Declaration of conformity (jp)** 2 MB, 23.03.2017

Code: mrl\_shgv-sve-svm\_jp

**Operating instructions and Declaration of conformity (de)** 2 MB, 25.07.2016

Code: mrl\_shgv-sve-svm\_de

**Operating instructions and Declaration of conformity (fr)** 2 MB, 16.09.2016

Code: mrl\_shgv-sve-svm\_fr

**Operating instructions and Declaration of conformity (nl)** 2 MB, 08.08.2018

Code: mrl\_shgv-sve-svm\_nl

**Operating instructions and Declaration of conformity (en)** 2 MB, 25.07.2016

Code: mrl\_shgv-sve-svm\_en

**Operating instructions and Declaration of conformity (pt)** 2 MB, 23.08.2016

Code: mrl\_shgv-sve-svm\_pt

**Operating instructions and Declaration of conformity (cn)** 2 MB, 27.07.2017

Code: mrl\_shgv-sve-svm\_cn

**Operating instructions and Declaration of conformity (pl)** 2 MB, 22.11.2016


Code: mrl\_shgv-sve-svm\_pl

**Operating instructions and Declaration of conformity (it)** 2 MB, 02.09.2016

Code: mrl\_shgv-sve-svm\_it


## Images

---

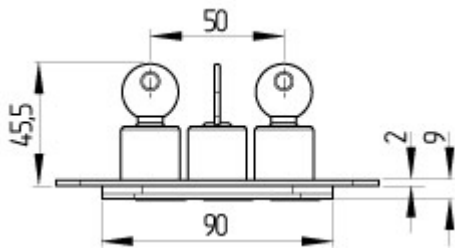


Dimensional drawing (basic component)

---

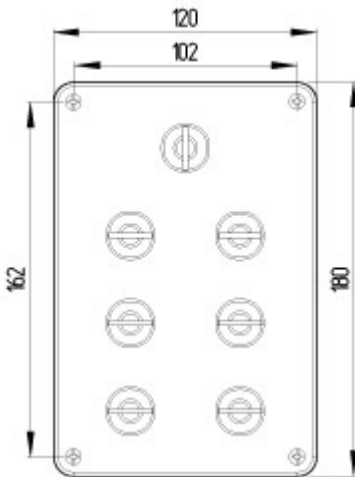

Dimensional drawing (basic component)

---

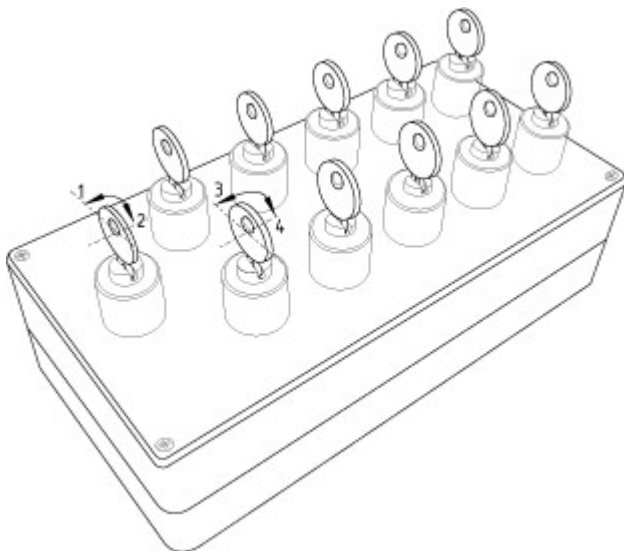

Operating principle

---

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 13:10:08h Kasbase 3.3.0.F.64I