

## Datasheet - AES 1112.3

Guard door monitors and Safety control modules for Emergency Stop applications / Micro  
Processor based safety controllers (Series AES) / AES 1112



- Monitoring of BNS range magnetic safety sensors
- 1 safety contact, STOP 0


(Minor differences between the printed image and the original product may exist!)

### Ordering details

Product type description	AES 1112.3
Article number	101128800
EAN Code	4030661059198
eCl@ss	27-37-19-01

### Approval


Approval



### Classification

Standards	EN ISO 13849-1, IEC 61508
PL	up c
Control category	up 1
PFH value	1.14 x 10 <sup>-6</sup> /h
- notice	up to max. 50.000 switching cycles/year and at max. 80% contact load
SIL	up 1
Mission time	20 Years

Global Properties

Permanent light	AES 1112
Standards	IEC/EN 60204-1, IEC 60947-5-3, IEC 61508, BG-GS-ET-14, BG-GS-ET-20
Compliance with the Directives (Y/N) 	Yes
Climatic stress	EN 60068-2-3, BG-GS-ET-14
Mounting	snaps onto standard DIN rail to EN 60715
Terminal designations	IEC/EN 60947-1
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic, ventilated
- Material of the contacts	AgCdO
Weight	120
Start conditions	Automatic
Start input (Y/N)	No
Feedback circuit (Y/N)	No
Start-up test (Y/N)	No
Reset after disconnection of supply voltage (Y/N)	Yes
Automatic reset function (Y/N)	Yes
Reset with edge detection (Y/N)	No
Drop-out delay	
- Drop-out delay in case of emergency stop	< 50

Mechanical data

Connection type	Screw connection
Cable section	
- Max. Cable section	2.5
Pre-wired cable	rigid or flexible
Tightening torque for the terminals	0,6
Detachable terminals (Y/N)	No
Mechanical life	10.000.000 operations
Electrical lifetime	100.000 operations for 230 VAC, 5 A (cos φ = 1)
restistance to shock	30 g / 11 ms
Resistance to vibration To EN 60068-2-6	10...55 HZ, Amplitude 0,35 mm, ± 15 %

Ambient conditions

Ambient temperature	
- Min. environmental temperature	0
- Max. environmental temperature	+55
Storage and transport temperature	
- Min. Storage and transport temperature	-25
- Max. Storage and transport temperature	+70
Protection class	
- Protection class-Enclosure	IP40
- Protection class-Terminals	IP20
- Protection class-Clearance	IP54
Air clearances and creepage distances To IEC/EN 60664-1	
- Rated impulse withstand voltage U <sub>imp</sub>	4
- Overvoltage category	III To VDE 0110
- Degree of pollution	2 To VDE 0110

Electromagnetic compatibility (EMC)

---

EMC rating

conforming to EMC Directive

## Electrical data

---

Rated DC voltage for controls

- |                                      |   |
|--------------------------------------|---|
| - Max. rated DC voltage for controls | - |
| - Max. rated DC voltage for controls | - |

Rated AC voltage for controls, 50 Hz

- |   |      |
|---|------|
| - Min. rated AC voltage for controls, 50 Hz | 20.4 |
| - Max. rated AC voltage for controls, 50 Hz | 26.4 |

Rated AC voltage for controls, 60 Hz

- |   |      |
|---|------|
| - Min. rated AC voltage for controls, 60 Hz | 20.4 |
| - Max. rated AC voltage for controls, 60 Hz | 26.4 |

Contact resistance

max. 100 mΩ

Power consumption

2.4

Type of actuation

AC

Switch frequency

10

Rated insulation voltage  $U_i$

250 V

Rated operating voltage  $U_e$

24 VAC

Thermal test current  $I_{the}$

4 A

Operating current  $I_e$

0,03 A

Electronic protection (Y/N)

No

## Inputs

---

### Monitored inputs

- |                                    |     |
|------------------------------------|-----|
| - Short-circuit recognition (Y/N)  | No  |
| - Wire breakage detection (Y/N)    | Yes |
| - Earth connection detection (Y/N) | No  |

Number of shutters

1

Number of openers

2

Input resistance

-

Input signal "1"

-

Input signal "0"

-

Cable length

1000 m with 0,75 mm<sup>2</sup> (for Rated voltage)

## Outputs

---

Stop category

0

Number of safety contacts

1

Number of auxiliary contacts

0

Number of signalling outputs

0

Switching capacity

- |   |                |
|---|----------------|
| - Switching capacity of the safety contacts | max. 4 A / 6 A |
|---|----------------|

Fuse rating

- |                                     |                     |
|-------------------------------------|---------------------|
| - Protection of the safety contacts | 4 A gG D-fuse / 6 A |
|-------------------------------------|---------------------|

Utilisation category To EN 60947-5-1

AC-15: 230 V / 3 A  
DC-13: 24 V / 2 A

Number of undelayed semi-conductor outputs with signaling function

0

Number of undelayed outputs with signaling function (with contact)

0

Number of delayed semi-conductor outputs with signaling function.

0

Number of delayed outputs with signalling function (with contact).

0

Number of secure undelayed semi-conductor outputs with signaling

function	0
Number of secure, undelayed outputs with signaling function, with contact.	0
Number of secure, delayed semi-conductor outputs with signaling function	0
Number of secure, delayed outputs with signaling function (with contact).	0

## LED switching conditions display

---

LED switching conditions display (Y/N)	Yes
Number of LED's	1
LED switching conditions display	
<ul style="list-style-type: none"> <li>- The integrated LEDs indicate the following operating states.</li> <li>- Authorized operation</li> </ul>	

## Miscellaneous data

---

Applications	 Safety sensor  Guard system
--------------	---

## Dimensions

---

Dimensions	
- Width	22.5 mm
- Height	75 mm
- Depth	110 mm

## notice

---

Inductive loads (e.g. contactors, relays, etc.) are to be suppressed by means of a suitable circuit.

## notice - Wiring example

---

To secure 2 guard doors up to PL c and Category 1

Monitoring 2 guard door(s), each with a magnetic safety sensor of the BNS range

Monitoring one guard door

If only one magnetic safety sensor is connected to S1, the terminals S22, S32 and C of S2 must be bridged.

The wiring diagram is shown with guard doors closed and in de-energised condition.

## Documents

---

**Operating instructions and Declaration of conformity (jp)** 306 kB, 27.08.2012

Code: mrl\_aes\_1102\_1112\_jp

**Operating instructions and Declaration of conformity (de)** 205 kB, 22.11.2017

Code: mrl\_aes\_1102\_1112\_de

**Operating instructions and Declaration of conformity (pt)** 240 kB, 03.01.2018

Code: mrl\_aes\_1102\_1112\_pt

**Operating instructions and Declaration of conformity (en)** 236 kB, 22.11.2017

Code: mrl\_aes\_1102\_1112\_en

**Operating instructions and Declaration of conformity (it)** 236 kB, 03.01.2018

Code: mrl\_aes\_1102\_1112\_it

**Operating instructions and Declaration of conformity (pl)** 250 kB, 03.01.2018

Code: mrl\_aes\_1102\_1112\_pl

**Operating instructions and Declaration of conformity (nl)** 235 kB, 03.01.2018

Code: mrl\_aes\_1102\_1112\_nl

**Operating instructions and Declaration of conformity (fr)** 238 kB, 03.01.2018

Code: mrl\_aes\_1102\_1112\_fr

**Operating instructions and Declaration of conformity (es)** 237 kB, 03.01.2018

Code: mrl\_aes\_1102\_1112\_es

**Wiring example (99)** 17 kB, 20.08.2008

Code: kaes1106

**BG-test certificate (de)** 273 kB, 27.08.2018

Code: z\_110p01

**BG-test certificate (en)** 272 kB, 27.08.2018


Code: z\_110p02

**EAC certification (ru)** 1 MB, 15.03.2018

Code: q\_aesp01

## Images

---

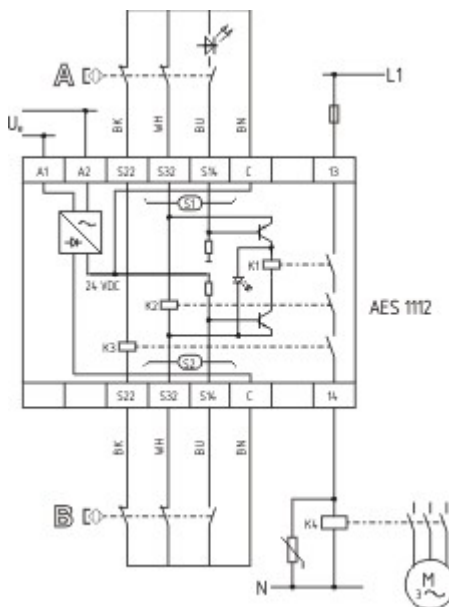

Wiring example