


Datasheet - NSR-0605/24

Safety light curtains, Safety light grids / Accessories / Safety monitoring module / NSR-0605

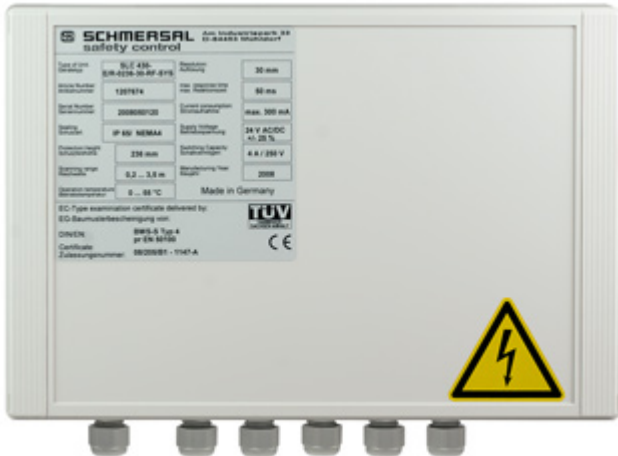

(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	NSR-0605/24
Article number	101207708
EAN Code	4030661378510
eCl@ss	

Global Properties

Permanent light	NSR Auswerteeinheit
Material of the housings	Aluminium
Weight	

Mechanical data

Number of beams	24
Resistance to vibration	10 ... 55

Ambient conditions

Ambient temperature	
- Min. environmental temperature	0
- Max. environmental temperature	+50
- Min. Storage and transport temperature	-10
- Max. Storage and transport temperature	+70
Protection class	IP65 to IEC/EN 60529

Interface

Electrical data

Switching voltage	250
Switching current	4 A
Rated operating voltage U_e	22 ... 30 VDC or 18 ... 25 VDC
Operating current I_e	< 300 mA


Outputs

Switching voltage	42 V
Switching current	4 A

Dimensions

Dimensions	
- Width	60 mm
- Height	160 mm
- Length	240 mm

Images

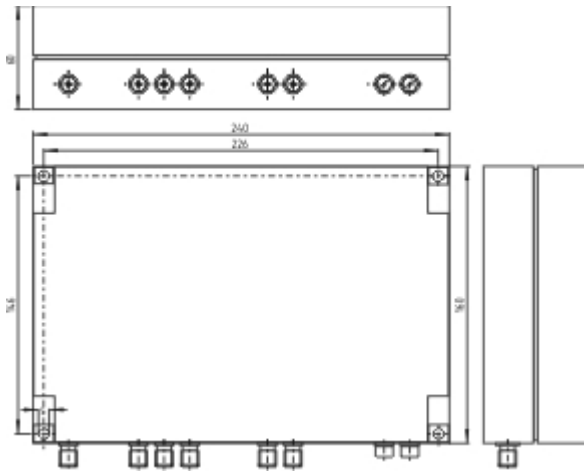

Dimensional drawing (basic component)

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 14:16:50h Kasbase 3.3.0.F.64I