

## Datasheet - IFL 0,8-4-10P

Inductive proximity switch / Housing construction form: cylinder smooth / IFL Ø 4 mm



- **NOTICE: Not available!**
- Design Ø 4 mm
- Metal enclosure
- DC 3-wire

(Minor differences between the printed image and the original product may exist!)

### Ordering details

Product type description	IFL 0,8-4-10P
<b>NOTICE: Not available!</b>	
Article number	101102256
EAN Code	4030661048079
eCl@ss	27-27-01-01

### Global Properties

Permanent light	IFL Ø 4 mm
Standards	IEC/EN 60947-5-2; DIN VDE 0660-208
Compliance with the Directives (Y/N) 	Yes
Operating resource protection class	None
Materials	
- Material of the housings	Stainless steel
- Material of the cable mantle	PVC
- Material of the terminal fixing	Plastic
Housing coating	None
Housing construction form	cylinder smooth
Weight	35

### Mechanical data

Design of electrical connection	Cable
---------------------------------	-------

Cable length	2
Conductor with strain relief	No
Conductors	3 x 0,14
mechanical installation conditions	flush
Switch distance $S_n$	0,8 mm
Reduction factor 1 met (Y/N)	No
Protection circuit	inductive interference protection, Protection against polarity reversal, short-circuit and overload proof (pulsed)
Pressure resistant (Y/N)	No

## Ambient conditions

---

Ambient temperature	
- Min. environmental temperature	-25
- Max. environmental temperature	+70
Protection class	IP67 to IEC/EN 60529

## Electrical data

---

Design of control element	Normally open contact (NO)
Number of wire	3
Voltage type	DC, direct current
Supply voltage $U_b$	
- Min. supply voltage	7
- Max. supply voltage	35
Switch frequency	approx. 1000 HZ
Voltage drop $U_d$	$\leq 2$ V (100 mA)
Operating current $I_e$	100 mA
No-load current $I_o$	< 2.5 mA

## Outputs

---

Design of control output	PNP
--------------------------	-----

## LED switching conditions display

---

LED switching conditions display (Y/N)	Yes
- yellow LED	

## ATEX

---

Explosion protection categories for gases	None
Explosion protected category for dusts	None

## Dimensions


---

Dimensions of the sensor	
- Width of sensor	4
- Height of sensor	4
- Length of sensor	27.5
- Diameter of sensor	4 mm






## notice

Clamp H 4 is included in delivery
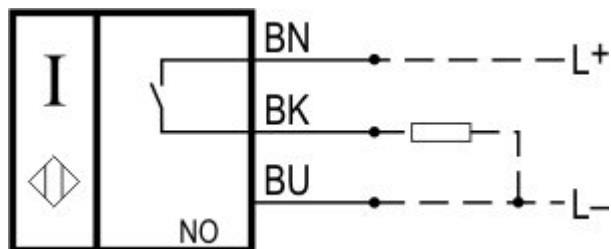
## Diagram



Note Diagram

-  positive break NC contact
-  active
-  no active
-  Normally-open contact
-  Normally-closed contact

## Ordering code

IFL (1)-(2)-(3)(4)(5)(6)

(1)	
0,8	Switch distance 0,8 mm
(2)	
4	cylinder smooth, Ø 4 mm
(3)	
01	Opener (NC)
10	Normally open contact (NO)
11	Normally open contact (NO) / Opener (NC) antivalent
(4)	
without	Cable
ST	Connector
(5)	
without	Included in standard version Plug-in connection
2	Alternative Plug-in connection
(6)	
N	n-type
P	p-type

## Documents

**Operating instructions** (nl) 134 kB, 01.08.2018

Code: mrl\_ifl-allgemein\_nl

**Operating instructions** (en) 128 kB, 31.08.2016

Code: mrl\_ifl-allgemein\_en

**Operating instructions** (pl) 137 kB, 21.10.2016

Code: mrl\_ifl-allgemein\_pl

**Operating instructions** (pt) 109 kB, 06.04.2017

Code: mrl\_ifl-allgemein\_pt

**Operating instructions** (it) 108 kB, 21.10.2016

Code: mrl\_ifl-allgemein\_it

**Operating instructions** (es) 110 kB, 21.10.2016

Code: mrl\_ifl-allgemein\_es

**Operating instructions** (cn) 177 kB, 05.05.2017

Code: mrl\_ifl-allgemein\_cn

**Operating instructions** (de) 131 kB, 31.08.2016

Code: mrl\_ifl-allgemein\_de

**Operating instructions** (fr) 110 kB, 21.10.2016

Code: mrl\_ifl-allgemein\_fr

**Declaration of conformity** (en) 91 kB, 13.04.2017


Code: konfi\_ifl\_en

**Declaration of conformity** (de) 96 kB, 01.07.2016

Code: konfi\_ifl\_de

## Images

---

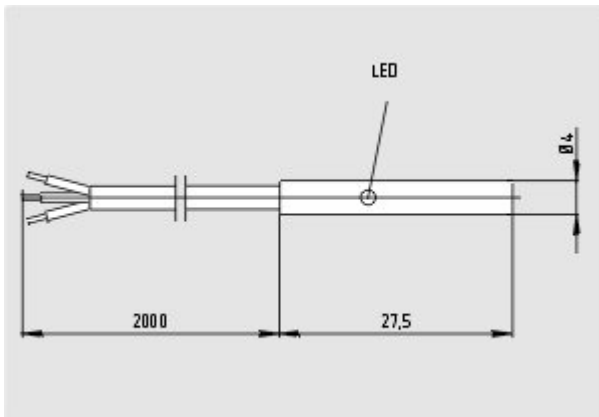

Dimensional drawing (basic component)

---

## System components

---

### Mounting accessories



#### 101103610 - MOUNTING CLAMP H 4

- For a smooth fitting of the proximity switches with cylindric shape  $\varnothing 4$  mm