

## Solenoid interlock / AZM190



- Thermoplastic enclosure
- Long life
- Interlock with protection against incorrect locking.
- 89 mm x 178 mm x 41 mm
- Actuating head can be repositioned by 4 x 90°
- 2 cable entries M 20 x 1.5
- Wiring compartment
- Slim design, particularly suitable for fitting on hinged doors, aluminium profiles and fencing
- Sealing mechanism to prevent the ingress of dirt
- Cut clamp termination
- Manual release

## Ordering details

Product type description	AZM190-02/10RKA-230VAC
Article number	101030205
EAN Code	4030661446110
<i>Replaced article number 101155670</i>	
eCl@ss	27-27-26-03


## Approval

Approval		
		BG
		USA/CAN
		CCC

## Classification

Standards	EN ISO 13849-1
B10d Normally-closed contact (NC)	2.000.000
B10d Normally open contact (NO)	1.000.000
Mission time	20 Years
notice	$MTTF_d = \frac{B_{10d}}{0,1 \times n_{op}}$ $n_{op} = \frac{d_{ap} \times h_{op} \times 3600 \text{ s/h}}{t_{cycle}}$

Global Properties

Permanent light	AZM190
Standards	EN 60947-5-1, BG-GS-ET-19
Compliance with the Directives (Y/N) 	Yes
Number of actuating directions	4
Active principle	electromechanical
Duty cycle ED	Magnet 100 %
Materials	
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic
- Material of the contacts	Silver
Housing coating	None
Weight	480

Mechanical data

Connection type	Screw connection
Cable section	
- Min. Cable section	1 x 0,5 mm²
- Max. Cable section	1 x 1.5 mm²
Mechanical life	2.000.000 operations
notice	All indications about the cable section are including the conductor ferrules.
Emergency unlocking device (Y/N)	No
Manual release (Y/N)	Yes
- front	
Emergency release (Y/N)	No
Latching force	20 N
Positive break force	20 N
positive break travel	2 x 3.5 mm
Clamping force F	1950 N

Ambient conditions

Ambient temperature	
- Min. environmental temperature	0 °C
- Max. environmental temperature	+50 °C
Protection class	IP67 to IEC/EN 60529

Electrical data

Design of control element	Normally open contact (NO), Opener (NC)
Switching principle	Creep circuit element
Number of auxiliary contacts	1
Number of safety contacts	2
Power to unlock	No
Power to lock	Yes
Rated control voltage U <sub>s</sub>	230 VAC
Power consumption	max. 8.5 W
Power consumption	max. 8.5 W
Rated impulse withstand voltage U <sub>imp</sub>	4 kV
Rated insulation voltage U <sub>i</sub>	250 V
Thermal test current I <sub>the</sub>	4 A
Utilisation category	AC-15: 230 V / 4 A,


Max. fuse rating

DC-13: 24 V / 4 A  
4 A gG D-fuse to DIN EN 60269-1

ATEX

Explosion protection categories for gases	None
Explosion protected category for dusts	None

Miscellaneous data

Applications	 hinged safety guard
--------------	---


Dimensions

Dimensions of the sensor	
- Width of sensor	89 mm
- Height of sensor	178 mm
- Length of sensor	41 mm






notice

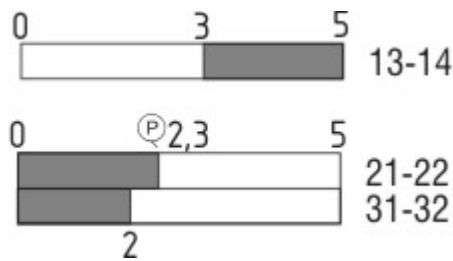- Manual release
- For manual release using triangular key M3 (included in delivery)
  - For maintenance, installation, etc.

Switch travel diagram



Notes Switch travel diagram

-  Contact closed
-  Contact open
-  Setting range
-  Break point
-  Positive opening sequence/- angle
- VS** adjustable range of NO contact
- VÖ** adjustable range of NC contact
- N** after travel

Ordering code

AZM190-(1)RK(2)(3)-(4)-(5)

(1)

02/01	Magnet: 2 Opener (NC); Actuator: 1 Opener (NC)
02/02	Magnet: 2 Opener (NC); Actuator 2 Opener (NC)
02/10	Magnet: 2 Opener (NC); Actuator: 1 Normally open contact (NO)
02/11	Magnet: 2 Opener (NC); Actuator: 1 Opener (NC) / 1 Normally open

	contact (NO)
<b>11/01</b>	Magnet: 1 Opener (NC) / 1 Normally open contact (NO); Actuator: 1 Opener (NC)
<b>11/02</b>	Magnet: 1 Opener (NC) / 1 Normally open contact (NO); Actuator: 2 Opener (NC)
<b>11/10</b>	Magnet: 1 Opener (NC) / 1 Normally open contact (NO); Actuator: 1 Normally open contact (NO)
<b>11/11</b>	Magnet: 1 Opener (NC) / 1 Normally open contact (NO); Actuator: 1 Opener (NC) / 1 Normally open contact (NO)
<b>(2)</b> <i>without</i> <b>A</b>	Power to unlock Power to lock
<b>(3)</b> <i>without</i> <b>E0</b> <b>E1</b> <b>N</b> <b>T</b>	With Manual release cover-side Without Manual release With Manual release lateral (right) Emergency release Emergency unlocking device
<b>(4)</b> <i>without</i> <b>G</b>	Without LED switching conditions display With LED switching conditions display (Only for 24 VAC/DC; not combinable in combination with -E1 und -T)
<b>(5)</b> <b>24VAC</b> <b>24VDC</b> <b>48VAC</b> <b>110VAC</b> <b>230VAC</b>	Us: 24 VAC Us: 24 VDC Us: 48 VAC Us: 110 VAC Us: 230 VAC

## Documents

---

**Operating instructions and Declaration of conformity (it)** 470 kB, 15.04.2016

Code: mrl\_azm190\_it

**Operating instructions and Declaration of conformity (jp)** 576 kB, 19.05.2017

Code: mrl\_azm190\_jp

**Operating instructions and Declaration of conformity (fr)** 474 kB, 27.04.2016

Code: mrl\_azm190\_fr

**Operating instructions and Declaration of conformity (pl)** 509 kB, 19.04.2016

Code: mrl\_azm190\_pl

**Operating instructions and Declaration of conformity (en)** 470 kB, 14.03.2016

Code: mrl\_azm190\_en

**Operating instructions and Declaration of conformity (cn)** 553 kB, 01.06.2017

Code: mrl\_azm190\_cn

**Operating instructions and Declaration of conformity (nl)** 506 kB, 30.07.2018

Code: mrl\_azm190\_nl

**Operating instructions and Declaration of conformity (pt)** 474 kB, 17.02.2017

Code: mrl\_azm190\_pt

**Operating instructions and Declaration of conformity** (es) 472 kB, 06.04.2016

Code: mrl\_azm190\_es

**Operating instructions and Declaration of conformity** (de) 472 kB, 14.03.2016

Code: mrl\_azm190\_de

**BG-test certificate** (en) 166 kB, 27.02.2014

Code: z\_m19p02

**BG-test certificate** (de) 169 kB, 27.02.2014

Code: z\_m19p01

**CCC certification** (cn) 872 kB, 16.08.2016

Code: q\_azmp07

**CCC certification** (en) 896 kB, 16.08.2016


Code: q\_azmp06

**EAC certification** (ru) 809 kB, 05.10.2015

Code: q\_6040p17\_ru

## Images

---

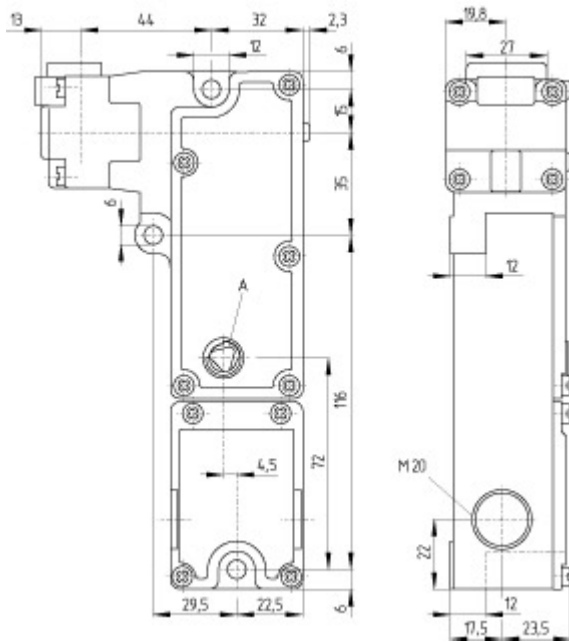

Dimensional drawing (basic component)

---

## System components

---

### Actuator



#### 101029965 - AZM190-B1

- Compensation for tolerances by means of rubber buffers
-



**101029967 - AZM190-B3/1X15**



**101029968 - AZM190-B3/1X7,5**



**101029938 - AZM190-B3/2X15**

- For very small actuating radii in line with or at 90° to the plane of the actuator



**101029966 - AZM190-B5**

- Particularly suitable for front mounting e.g. on hinged guards



**103009445 - AZM190-B3V/15**

- Especially for aluminium profiles



**103009443 - AZM190-B3V/2X15**

- For very small actuating radii in line with or at 90° to the plane of the actuator
- Especially for aluminium profiles



**103009444 - AZM190-B3V/7,5**

- Especially for aluminium profiles

## Accessories

**101029969 - MP190 MOUNTING PLATE**

- For simple mounting of an AZM190 on profile systems



---

**101028565 - TRIANGULAR KEY TZ-75**

- For manual release
- angled triangular key



---

**103009486 - MP190-V MOUNTING PLATE**

- Mounting of the solenoid interlock and mounting plate on the inside for right-hinged doors



---

**103009487 - MP190-VD MOUNTING PLATE**

- Mounting of the solenoid interlock and mounting plate on the inside for left-hinged doors
- 

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 14:49:16h Kasbase 3.3.0.F.64l