


Datasheet - AZ/AZM201-B30-LTAG1

Solenoid interlock / AZM201 / Actuator / AZ/AZM201-B30



Preferred typ

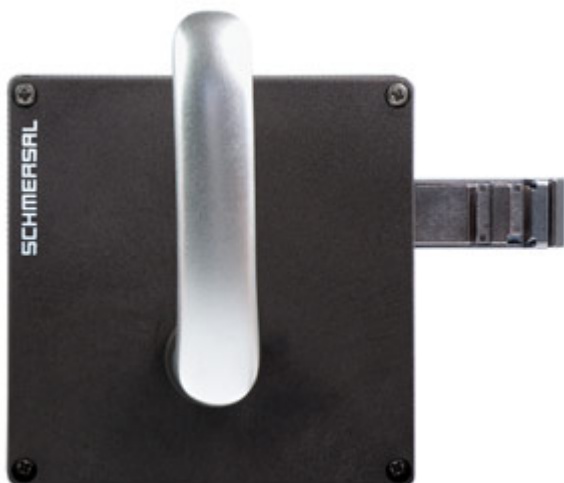

- Actuator for hinged guards
- Easy and intuitive operation
- No risk of injury from protruding actuator
- No supplementary door handles required
- Does not protrude into the door opening
- for left hinged doors
- with handle

(Minor differences between the printed image and the original product may exist!)

Ordering details

| | |
|--------------------------|---------------------|
| Product type description | AZ/AZM201-B30-LTAG1 |
| Article number | 103013501 |
| EAN Code | 4030661493497 |
| eCl@ss | 27-27-06-05 |

Approval

Approval



notice

Certification in combination with the AZ/AZM201

Global Properties

| | |
|-----------------------------|---|
| Permanent light | AZ/AZM201-B30 |
| Materials | |
| - Material of the housings | Plastic, glass-fibre reinforced thermoplastic |
| - Material of the actuator | zinc die-cast |
| - Material of the operators | Aluminium, plastic coating |
| Emergency exit material | |
| Weight | 590 g |

Mechanical data

| | |
|----------------------------------|------------------------|
| Mechanical life | ≥ 1.000.000 operations |
| Emergency unlocking device (Y/N) | No |

| | |
|--|---------|
| Grip | handle |
| integrated lockout tag available (Y/N) | No |
| Clamping force | 2000 |
| Actuator mounted | outside |
| Door hinge | left |

Dimensions

Dimensions of the actuators

| | |
|--------------------------|--------|
| - Width of the actuator | 115 mm |
| - Height of the actuator | 115 mm |
| - Length of the actuator | 60 mm |

Emergency exit dimensions

| |
|--------------------------------|
| - Width of the emergency exit |
| - Height of the emergency exit |
| - Length of the emergency exit |

Included in delivery

The safety switch / solenoid interlock and the actuator unit must be ordered separately.

Ordering code

AZ/AZM201-B30-(1)T(2)(3)(4)-(5)

(1)

| | |
|---|-------------------------------|
| L | Door hinge on left-hand side |
| R | Door hinge on right-hand side |

(2)

| | |
|---|----------------------|
| A | for Mounting outside |
| I | for Mounting inside |

(3)

| | |
|----|--------------------|
| G1 | with handle |
| G2 | with Rotating knob |

(4)

| | |
|---------|--|
| P1 | with Emergency exit |
| P20 | with Emergency exit Metal film (<i>Only for Mounting outside possible</i>) |
| P25 | with Emergency exit Inset handle (<i>Only for Mounting outside possible</i>) |
| P30/P31 | with Locking rod (<i>Only for Mounting outside possible</i>) |

(5)

| | |
|---------|--|
| without | without Lockout tag |
| SZ | with Lockout tag (<i>Only for Mounting outside possible</i>) |

Documents

Operating instructions (nl) 1 MB, 24.09.2018

Code: mrl_az-azm201-b30_nl

Operating instructions (fr) 1 MB, 24.09.2018

Code: mrl_az-azm201-b30_fr

Operating instructions (it) 1 MB, 24.09.2018

Code: mrl_az-azm201-b30_it

Operating instructions (en) 975 kB, 24.09.2018

Code: mrl_az-azm201-b30_en

Operating instructions (es) 982 kB, 24.09.2018

Code: mrl_az-azm201-b30_es

Operating instructions (jp) 1 MB, 24.09.2018

Code: mrl_az-azm201-b30_jp

Operating instructions (pt) 1 MB, 24.09.2018

Code: mrl_az-azm201-b30_pt

Operating instructions (cn) 1 MB, 23.11.2018

Code: mrl_az-azm201-b30_cn

Operating instructions (de) 983 kB, 27.09.2018

Code: mrl_az-azm201-b30_de


Operating instructions (pl) 1 MB, 24.09.2018

Code: mrl_az-azm201-b30_pl

Images



Product photo

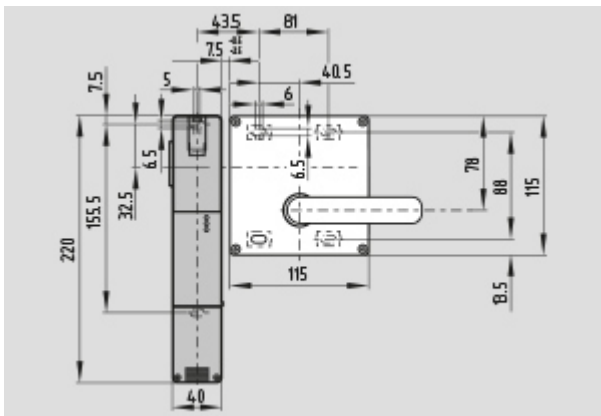

System components

Product



AZM201

- Thermoplastic enclosure
- RFID-technology for needs-based protection against tampering
- Max. length of the sensor chain 200 m
- Self-monitoring series-wiring of 31 sensors
- 3 LEDs to show operating conditions
- Sensor technology permits an offset between actuator and interlock of ± 5 mm vertically and ± 3 mm horizontally
- Suitable for hinged and sliding guards
- Intelligent diagnosis
- Manual release

K.A. Schmersal GmbH & Co. KG, Mödinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 14:50:11h Kasbase 3.3.0.F.64I