


**Description**

- 115 V ac or 230 V ac supply voltage
- 1 relay output
- Adjustable on/off time delay
- Switch selectable light or dark function
- Power, input and output indicators
- 11-pole DIN socket connection

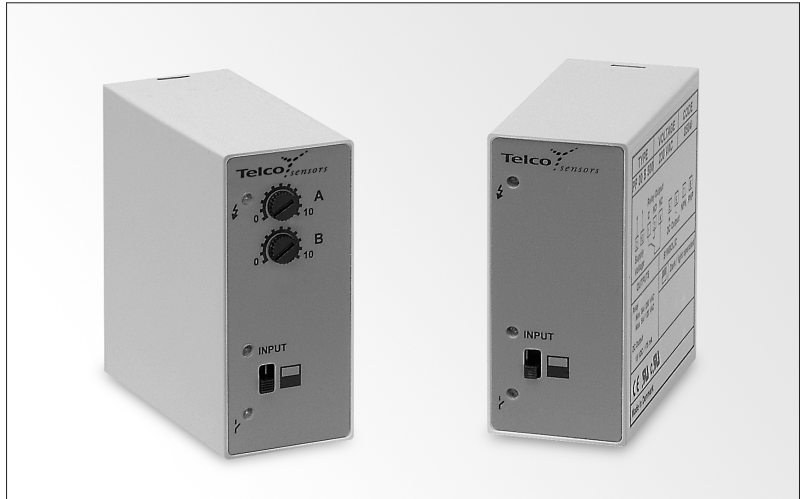

The PP 00 is intended to be used in conjunction with a Spacemaster, SpacePak or SpaceGuard system, where a DC supply voltage is not available and where a relay output is required. This power pack series provides a fixed 15 V dc output voltage, available with or without an adjustable 0-10 sec on/off time delay. Light or dark function is switch selectable.


Technical Data	
Supply voltage	115 V ac or 230 V ac
Voltage tolerance	+/- 15%
Current consumption	Max. 4 VA
Relay output	1 open / 1 close 250 V ac / 3A, 120 V ac / 5A
Output voltage	15 V
Output current	Max. 175 mA
Power on indicator	Green LED
Input indicator	Green LED
Output indicator	Yellow LED
Delay t <sub>ON</sub> / t <sub>OFF</sub>	PP 00 A: 0-10 sec, adjustable
Housing material	Noryl

Environmental Data	
Temperature, operation	-10 to +50 °C
Temperature, storage	-40 to +80 °C
Sealing class	IP 40
Approvals	CE, TÜV


Available Types					
Model	Connection	Time Delay	Supply Voltage		Order Reference
			115 V ac	230 V ac	
PP 00 A	11-pole DIN socket	On/Off delay	Relay	PP 00 A 501	PP 00 A 500
PP 00 B		-		PP 00 B 501	PP 00 B 500

Note: 11-pole DIN socket to be ordered separately.


Wiring Diagrams

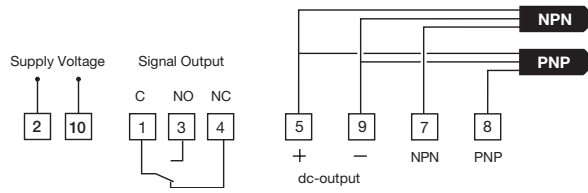

Dimensions and Descriptions

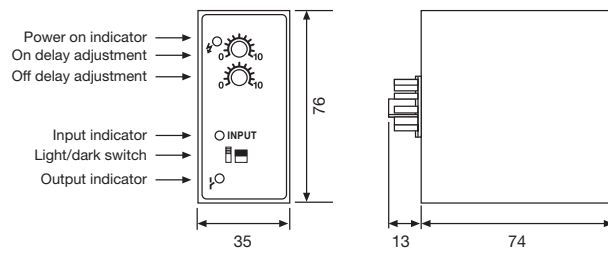

PP 00 A

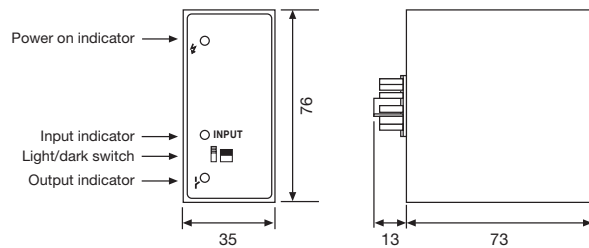

PP 00 B

(Units in mm)

Telco reserves the right to change specifications without notice.