

Inductive Sensor with Increased Switching Distance

I12H023

Part Number

weproTec



- Increased switching distance
- Innovative ASIC circuit technology
- Integrated error display
- Minimal mounting clearance thanks to wenglor weproTec



Inductive Sensors with increased switching distances are distinguished by rugged design, easy installation and reliable measured values. The large range makes additional types of sensor superfluous because they can also be used to implement special applications. In addition to error-free operation of several sensors in a very small space, the new generation also provides the possibility of detecting system errors before it's too late thanks to ASIC und wenglor weproTec.

Technical Data

| Inductive Data | |
|--|---------------------|
| Switching Distance | 4 mm |
| Correction Factors Stainless Steel V2A/CuZn/Al | 1,02/0,52/0,50 |
| Mounting | flush |
| Mounting A/B/C/D in mm | 0/8/12/0 |
| Mounting B1 in mm | 0...2 |
| Switching Hysteresis | < 10 % |
| Electrical Data | |
| Supply Voltage | 10...30 V DC |
| Current Consumption (U _b = 24 V) | < 6 mA |
| Switching Frequency | 1150 Hz |
| Temperature Drift | < 10 % |
| Temperature Range | -40...80 °C |
| Switching Output Voltage Drop | < 1 V |
| Switching Output/Switching Current | 150 mA |
| Residual Current Switching Output | < 100 µA |
| Short Circuit Protection | yes |
| Reverse Polarity and Overload Protection | yes |
| Protection Class | III |
| Mechanical Data | |
| Housing Material | CuZn, nickel-plated |
| Degree of Protection | IP67 |
| Connection | M12 × 1; 3-pin |
| Safety-relevant Data | |
| MTTFd (EN ISO 13849-1) | 3706,54 a |
| Function | |
| Error Indicator | yes |
| PNP NC | ● |
| Connection Diagram No. | 145 |
| Suitable Connection Technology No. | 2 |
| Suitable Mounting Technology No. | 170 171 |

Complementary Products

PNP-NPN Converter BG2V1P-N-2M

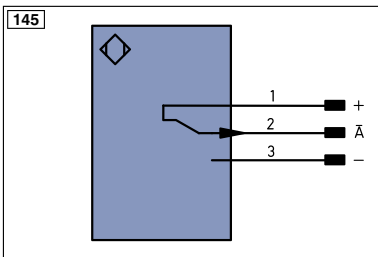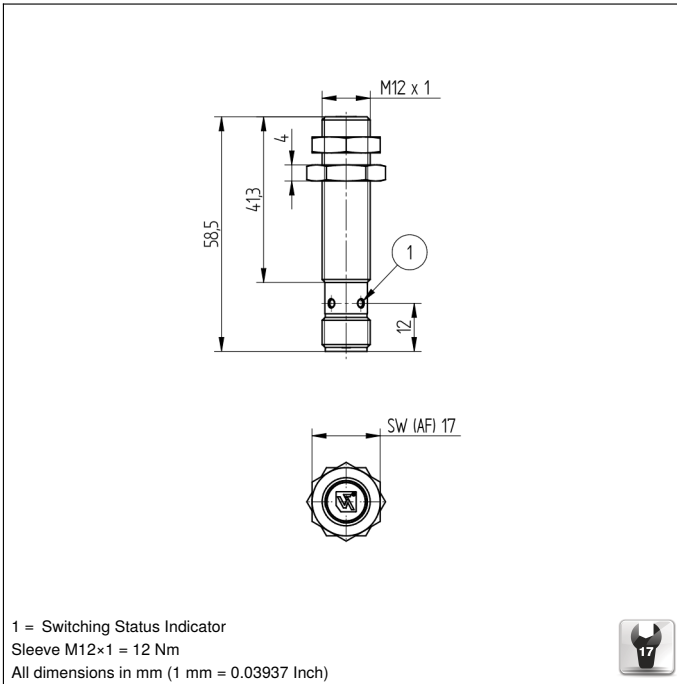

| Legend | |
|-------------|--|
| + | Supply Voltage + |
| - | Supply Voltage 0 V |
| ~ | Supply Voltage (AC Voltage) |
| A | Switching Output (NO) |
| Ā | Switching Output (NC) |
| V | Contamination/Error Output (NO) |
| ṽ | Contamination/Error Output (NC) |
| E | Input (analog or digital) |
| T | Teach Input |
| Z | Time Delay (activation) |
| S | Shielding |
| RxD | Interface Receive Path |
| TxD | Interface Send Path |
| RDY | Ready |
| GND | Ground |
| CL | Clock |
| E/A | Output/Input programmable |
| | IO-Link |
| PoE | Power over Ethernet |
| IN | Safety Input |
| OSSD | Safety Output |
| Signal | Signal Output |
| Bl...D +/- | Ethernet Gigabit bidirect. data line (A-D) |
| EN0...5422 | Encoder 0-pulse 0-0 (TTL) |
| PT | Platinum measuring resistor |
| nc | not connected |
| U | Test Input |
| Ū | Test Input inverted |
| W | Trigger Input |
| O | Analog Output |
| O- | Ground for the Analog Output |
| BZ | Block Discharge |
| AwV | Valve Output |
| a | Valve Control Output + |
| b | Valve Control Output 0 V |
| SY | Synchronization |
| E+ | Receiver-Line |
| S+ | Emitter-Line |
| ≡ | Grounding |
| SnR | Switching Distance Reduction |
| Rx +/- | Ethernet Receive Path |
| Tx +/- | Ethernet Send Path |
| Bus | Interfaces-Bus A(+)/B(-) |
| La | Emitted Light disengageable |
| Mag | Magnet activation |
| RES | Input confirmation |
| EDM | Contactor Monitoring |
| ENAR...5422 | Encoder A/Ā (TTL) |
| ENBR...5422 | Encoder B/B̄ (TTL) |
| ENa | Encoder A |
| ENb | Encoder B |
| AMIN | Digital output MIN |
| AMAX | Digital output MAX |
| AOK | Digital output OK |
| SY In | Synchronization In |
| SY OUT | Synchronization OUT |
| Ort | Brightness output |
| M | Maintenance |

| Wire Colors according to DIN IEC 757 | |
|--------------------------------------|--------------|
| BK | Black |
| BN | Brown |
| RD | Red |
| OG | Orange |
| YE | Yellow |
| GN | Green |
| BU | Blue |
| VT | Violet |
| GY | Grey |
| WH | White |
| PK | Pink |
| GNYE | Green/Yellow |

Mounting

