

Inductive Sensor

Welding Field Resistant with Correction Factor 1

I18A001

Part Number



- **Extended temperature range**
- **Greatest possible switching distances with correction factor 1**
- **Very good magnetic and electromagnetic immunity**
- **Very high switching frequency**


Welding field resistant inductive sensors with correction factor 1 offer a unique combination of technical performance features: increased switching distances for reliable object detection, high switching frequencies for applications with high process speeds and an extended temperature range for use under various ambient conditions. A switching status LED for diagnosis functions reduces system downtime. In order to simplify integration, all housing designs are available in flush or non-flush mounting variants.

Technical Data

Inductive Data	
Switching Distance	8 mm
Correction Factors Stainless Steel V2A/CuZn/Al	1,06/1,07/1,07
Mounting	flush
Mounting A/B/C/D in mm	0/5/24/0
Switching Hysteresis	< 15 %
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 15 mA
Switching Frequency	3500 Hz
Temperature Drift (-25 °C < T _u < 60 °C)	10 %
Temperature Drift (T _u < -25 °C, T _u > 60 °C)	20 %
Temperature Range	-40...80 °C
Switching Output Voltage Drop	< 2,5 V
Switching Output/Switching Current	200 mA
Resistant to Magnetic Fields	200 mT
Short Circuit Protection	yes
Reverse Polarity and Overload Protection	yes
Protection Class	II
Protective Insulation, Rated Voltage	100 V
Mechanical Data	
Housing Material	CuZn; Teflon
Welding Field Resistant	yes
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	2169,26 a
Function	
Error Indicator	yes
PNP NO/NC antivalent	●
Connection Diagram No.	101
Suitable Connection Technology No.	2
Suitable Mounting Technology No.	150 151


Complementary Products

PNP-NPN Converter BG2V1P-N-2M

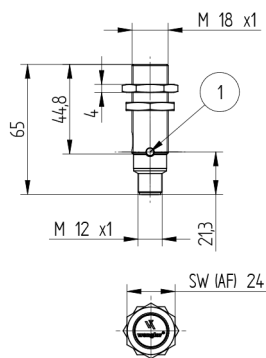

1 = Switching Status Indicator
Sleeve M18x1 = 12 Nm
All dimensions in mm (1 mm = 0.03937 Inch)

101



Legend

+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	U	Test Input inverted
Ā	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
V̄	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	AWV	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	E+	Receiver-Line
RDY	Ready	S+	Emitter-Line
GND	Ground	±	Grounding
CL	Clock	SnR	Switching Distance Reduction
E/A	Output/Input programmable	Rx+/-	Ethernet Receive Path
IO-Link	IO-Link	Tx+/-	Ethernet Send Path
PoE	Power over Ethernet	Bus	Interfaces-Bus A(+)/B(-)
IN	Safety Input	La	Emitted Light disengageable
OSSD	Safety Output	Mag	Magnet activation
Signal	Signal Output	RES	Input confirmation
BI...D+/-	Ethernet Gigabit bidirect. data line (A-D)	EDM	Contactor Monitoring
EN0 RS422	Encoder 0-pulse 0-0 (TTL)	ENAR5422	Encoder A/Ā (TTL)
		ENBR5422	Encoder B/B̄ (TTL)

ENa	Encoder A
ENb	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY In	Synchronization In
SY OUT	Synchronization OUT
OLt	Brightness output
M	Maintenance

Wire Colors according to DIN IEC 757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

Mounting

