

# 2D/3D Profile Sensor

**MLWL151**

**LASER**


Part Number

weCat3D



- Blue light for applications on metal, organic or semi-transparent materials
- Increased resistance to extraneous light and high speed
- Optimized profile quality thanks to HDR function
- Precise measuring range resolution X (> 2000 measuring points)
- Up to 12 million measuring points per second

2D/3D Profile Sensors project a laser line onto the object to be detected and generate an accurate, linearized height profile with an internal camera which is set up at a triangulation angle. Thanks to its uniform, open interface, the weCat3D series can be incorporated by means of the DLL program library or the GigE Vision standard without an additional control unit. Alternatively, wenglor offers its own software packages for implementing your application.

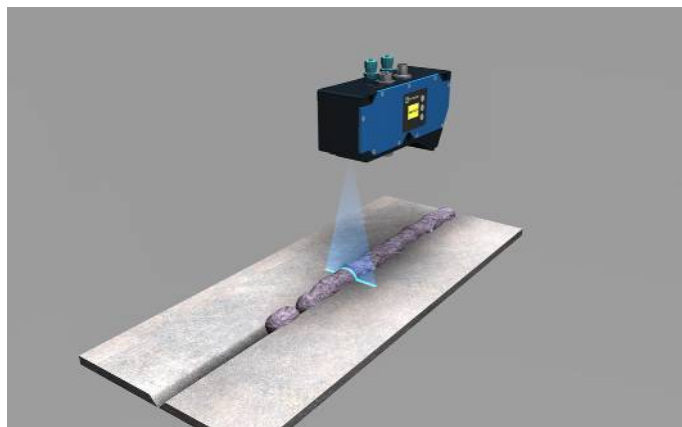


## Technical Data

Optical Data	
Working range Z	70...130 mm
Measuring range Z	60 mm
Measuring range X	30...52 mm
Linearity Deviation	15 µm
Resolution Z	2...4,9 µm
Resolution X	17...26 µm
Light Source	Laser (blue)
Wavelength	405 nm
Service Life (T = +25 °C)	20000 h
Laser Class (EN 60825-1)	3R
Max. Ambient Light	5000 Lux
Electrical Data	
Supply Voltage	18...30 V DC
Current Consumption (Ub = 24 V)	300 mA
Measuring Rate	175...6000 /s
Temperature Range	0...45 °C
Storage temperature	-20...70 °C
Inputs/Outputs	4
Switching Output Voltage Drop	< 1,5 V
Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Interface	Ethernet TCP/IP
Baud Rate	100/1000 Mbit/s
Protection Class	III
FDA Accession Number	1710276-001
Mechanical Data	
Housing Material	Aluminum
Degree of Protection	IP67
Connection	M12 × 1; 12-pin
Type of Connection Ethernet	M12 × 1; 8-pin, X-cod.
Optic Cover	Glass
Weight	480 g
Web server	yes
Configurable as PNP/NPN/Push-Pull	<input checked="" type="checkbox"/>
Switchable to NC/NO	<input checked="" type="checkbox"/>
Connection Diagram No.	<b>1022</b> <b>1023</b>
Control Panel No.	<b>X2</b> <b>A22</b>
Suitable Connection Equipment No.	<b>50</b> <b>87</b>
Suitable Mounting Technology No.	<b>343</b>

Display brightness may decrease with age. This does not result in any impairment of the sensor function.


## Complementary Products

Control Unit
Cooling Unit ZLWK001
Protective Screen Retainer ZLWS001
Software
Switch ZAC45FN01


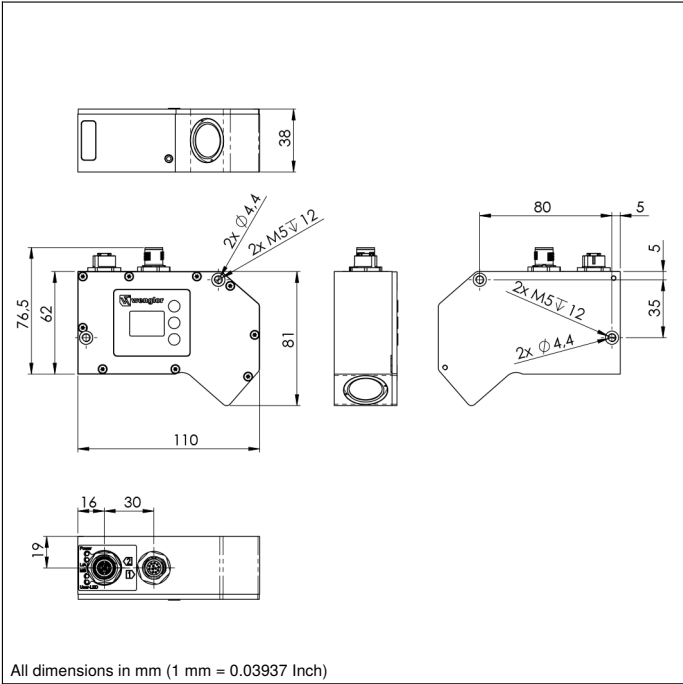


All dimensions in mm (1 mm = 0.03937 Inch)

### Ctrl. Panel



20 = Enter Button  
22 = UP Button  
23 = Down Button  
4a = User LED  
60 = Display  
68 = Supply Voltage Indicator  
78 = Module status  
85 = Link/Act LED

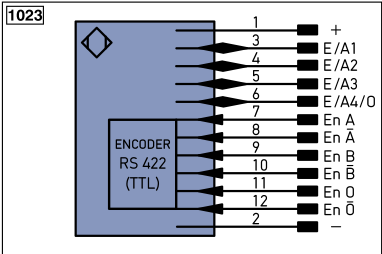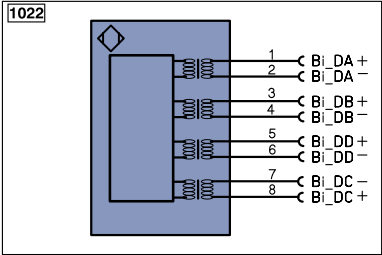


### Legend

<b>+</b> Supply Voltage +	<b>PT</b> Platinum measuring resistor	<b>ENa</b> Encoder A
<b>-</b> Supply Voltage 0 V	<b>nc</b> not connected	<b>ENb</b> Encoder B
<b>~</b> Supply Voltage (AC Voltage)	<b>U</b> Test Input	<b>AMIN</b> Digital output MIN
<b>A</b> Switching Output (NO)	<b>U</b> Test Input inverted	<b>AMAX</b> Digital output MAX
<b>Ä</b> Switching Output (NC)	<b>W</b> Trigger Input	<b>AOK</b> Digital output OK
<b>V</b> Contamination/Error Output (NO)	<b>O</b> Analog Output	<b>SY In</b> Synchronization In
<b>V̄</b> Contamination/Error Output (NC)	<b>O-</b> Ground for the Analog Output	<b>SY OUT</b> Synchronization OUT
<b>E</b> Input (analog or digital)	<b>BZ</b> Block Discharge	<b>LI</b> Brightness output
<b>T</b> Teach Input	<b>AWV</b> Valve Output	<b>M</b> Maintenance
<b>Z</b> Time Delay (activation)	<b>a</b> Valve Control Output +	<b>rsv</b> reserved
<b>S</b> Shielding	<b>b</b> Valve Control Output 0 V	
<b>RxD</b> Interface Receive Path	<b>SY</b> Synchronization	
<b>TxD</b> Interface Send Path	<b>E+</b> Receiver-Line	
<b>RDY</b> Ready	<b>S+</b> Emitter-Line	
<b>GND</b> Ground	<b>±</b> Grounding	
<b>CL</b> Clock	<b>SnR</b> Switching Distance Reduction	
<b>E/A</b> Output/Input programmable	<b>Rx+/-</b> Ethernet Receive Path	
<b>IO-Link</b>	<b>Tx+/-</b> Ethernet Send Path	
<b>PoE</b> Power over Ethernet	<b>Bus</b> Interfaces-Bus A(+)/B(-)	
<b>IN</b> Safety Input	<b>La</b> Emitted Light disengageable	
<b>OSSD</b> Safety Output	<b>Mag</b> Magnet activation	
<b>Signal</b> Signal Output	<b>RES</b> Input confirmation	
<b>BI_D+/-</b> Ethernet Gigabit bidirect. data line (A-D)	<b>EDM</b> Contactor Monitoring	
<b>EN0 RS422</b> Encoder 0-pulse 0-0 (TTL)	<b>ENa RS422</b> Encoder A/A (TTL)	
	<b>ENb RS422</b> Encoder B/B (TTL)	

### Wire Colors according to DIN IEC 757

<b>BK</b>	Black
<b>BN</b>	Brown
<b>RD</b>	Red
<b>OG</b>	Orange
<b>YE</b>	Yellow
<b>GN</b>	Green
<b>BU</b>	Blue
<b>VT</b>	Violet
<b>GY</b>	Grey
<b>WH</b>	White
<b>PK</b>	Pink
<b>GNYE</b>	Green/Yellow

### Measuring field X, Z

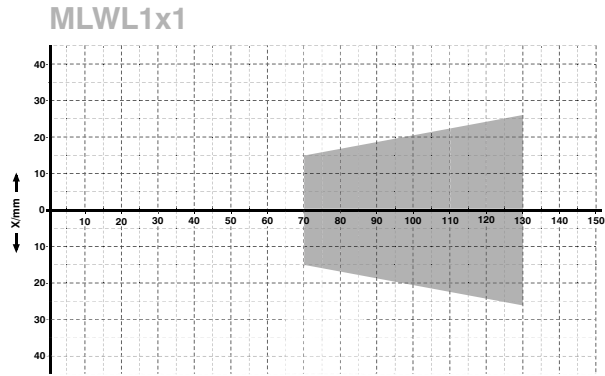

Z = Working distance  
X = Measuring Range

