

Emergency Stop Switch Contact Block

SC20I01S

Part Number



- Integrated defect protection
- Narrow installation width

Contact blocks are suitable for applications up to PL e per EN ISO 13849-1 and up to SIL CL 3 per EN 62061.

Technical Data

Electrical Data

Temperature Range	-30...85 °C
Storage temperature	-50...85 °C
Service Life (nominal load)	20000 Switching Cycles
Protective Insulation, Rated Voltage	250 V

Mechanical Data

Contact material	AgNi
Service Life	20000 Switching Cycles
Bounce time	< 10 ms
Connection	Screw-type connection
Clampable Wire Cross-Section	2,5 mm ²

Safety-relevant Data

B10d Switching Cycles	104 000
Number of positively driven contacts	2

Function

Defect protection	yes
Applicable actuator	SEAC01 SEAN01 SEAP01


Connection Diagram No.

P06


Actuator must be ordered separately (not included in delivery)

Complementary Products


Safety Relay SR4B3B01S, SR4D3B01S
Software

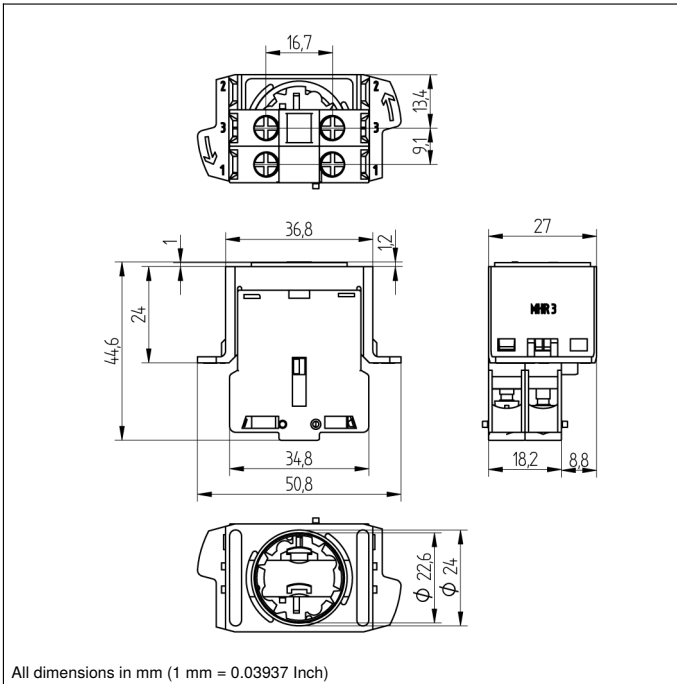

All dimensions in mm (1 mm = 0.03937 Inch)

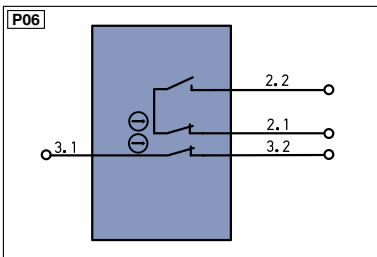

Legend

+	Supply Voltage +	PT	Platinum measuring resistor	ENa	Encoder A
-	Supply Voltage 0 V	nc	not connected	ENb	Encoder B
~	Supply Voltage (AC Voltage)	U	Test Input	AMIN	Digital output MIN
A	Switching Output (NO)	U	Test Input inverted	AMAX	Digital output MAX
Ā	Switching Output (NC)	W	Trigger Input	AOK	Digital output OK
V	Contamination/Error Output (NO)	O	Analog Output	SY In	Synchronization In
ṽ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY OUT	Synchronization OUT
E	Input (analog or digital)	BZ	Block Discharge	Ort	Brightness output
T	Teach Input	AWV	Valve Output	M	Maintenance
Z	Time Delay (activation)	a	Valve Control Output +		
S	Shielding	b	Valve Control Output 0 V		
RxD	Interface Receive Path	SY	Synchronization		
TxD	Interface Send Path	E+	Receiver-Line		
RDY	Ready	S+	Emitter-Line		
GND	Ground	≡	Grounding		
CL	Clock	SnR	Switching Distance Reduction		
E/A	Output/Input programmable	Rx+/-	Ethernet Receive Path		
	IO-Link	Tx+/-	Ethernet Send Path		
PoE	Power over Ethernet	Bus	Interfaces-Bus A(+)/B(-)		
IN	Safety Input	La	Emitted Light disengageable		
OSSD	Safety Output	Mag	Magnet activation		
Signal	Signal Output	RES	Input confirmation		
Bl..D+/-	Ethernet Gigabit bidirect. data line (A-D)	EDM	Contactorm Monitoring		
EN0r5422	Encoder 0-pulse 0-0 (TTL)	ENAr5422	Encoder A/Ā (TTL)		
		ENBr5422	Encoder B/B̄ (TTL)		

Wire Colors according to DIN IEC 757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

