

# Safety Light Curtain

## Hand Protection

# SEMG517

Part Number



- Easy configuration via wiring
- Protection field over the entire length of the housing for an installation without protrusion
- Quick alignment through visible red light
- Slim design for easy integration

These safety light curtains confidently solve all basic tasks. The basic function protection mode, restart inhibit and protection monitoring are standard and can be easily configured. The protective field always extends up to the end of the housing without protrusion. As a result, protection is easily provided even in confined installation conditions. The adequate mounting angle ZEMX001 is included in the delivery.



## Technical Data


| Optical Data                                |                                      |
|---|--------------------------------------|
| Range                                       | 0,25...14 m                          |
| Housing Length (L)                          | 1062 mm                              |
| Safety Field Height (SFH)                   | 1087 mm                              |
| Resolution                                  | 30 mm                                |
| Light Source                                | Red Light                            |
| Wave Length                                 | 630 nm                               |
| Opening Angle                               | ± 2,5 °                              |
| Electrical Data                             |                                      |
| Sensor Type                                 | Emitter                              |
| Supply Voltage                              | 19,2...28,8 V DC                     |
| Current Consumption (U <sub>b</sub> = 24 V) | 100 mA                               |
| Temperature Range                           | -25...55 °C                          |
| Storage temperature                         | -25...60 °C                          |
| Reverse Polarity Protection                 | yes                                  |
| Protection Class                            | III                                  |
| Mechanical Data                             |                                      |
| Housing Material                            | Aluminum                             |
| Disk Material                               | Polycarbonate                        |
| Degree of Protection                        | IP65/IP67                            |
| Connection                                  | M12 × 1; 4/5-pin                     |
| Cable Length                                | 300 mm                               |
| Safety-relevant Data                        |                                      |
| ESPE Type (EN 61496)                        | 4                                    |
| Performance Level (EN ISO 13849-1)          | Cat. 4 PL e                          |
| Service Life TM (EN ISO 13849-1)            | 20 a                                 |
| Safety Integrity Level (EN 61508)           | SIL3                                 |
| Safety Integrity Level (EN 62061)           | SILCL3                               |
| Function                                    |                                      |
| Hand Protection                             | yes                                  |
| Scope of delivery                           | Mounting ZEMX001                     |
| Connection Diagram No.                      | <b>362</b>                           |
| Control Panel No.                           | <b>SR4</b>                           |
| Suitable Connection Technology No.          | <b>2</b>   <b>35</b>                 |
| Suitable Mounting Technology No.            | <b>790</b>   <b>810</b>   <b>820</b> |

## Suitable Receiver


SEMG617

## Complementary Products


|   |
|---|
| Path-Folding Mirror Z2UG003                               |
| Protection Column with Path-Folding Mirror SZ000EU125NN01 |
| Protection Column with Protective Screen SZ000EG125NN01   |
| Software  |

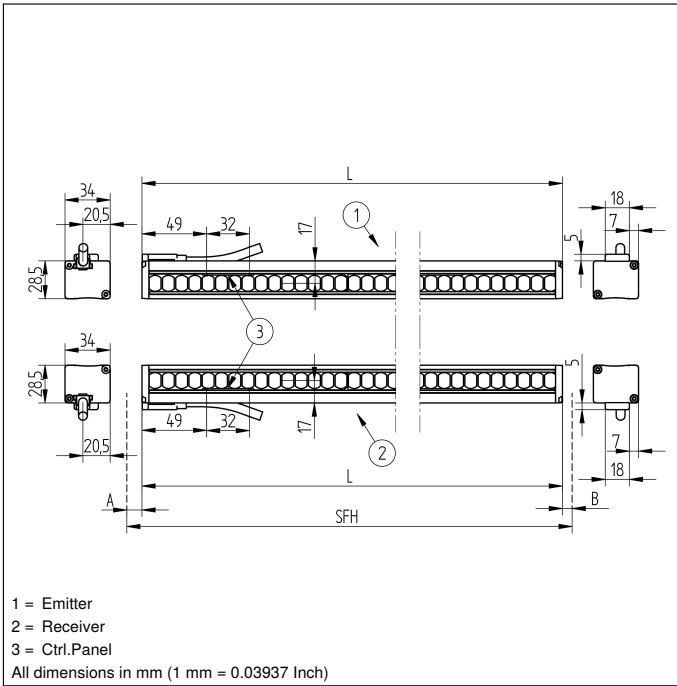

### Ctrl. Panel



- 03 = Error Indicator
- 04 = Function Indicator
- 64 = Diagnosis/Test
- 94 = Diagnosis
- 95 = Diagnosis/Large Detection Range

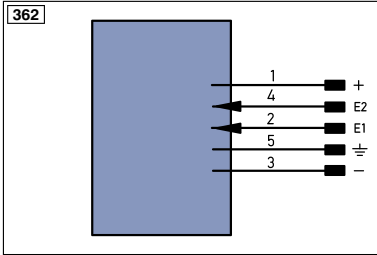

### Legend

|           |  |          |                              |        |                     |
|-----------|--|----------|------------------------------|--------|---------------------|
| +         | Supply Voltage +                           | PT       | Platinum measuring resistor  | ENa    | Encoder A           |
| -         | Supply Voltage 0 V                         | nc       | not connected                | ENb    | Encoder B           |
| ~         | Supply Voltage (AC Voltage)                | U        | Test Input                   | AMIN   | Digital output MIN  |
| A         | Switching Output (NO)                      | U        | Test Input inverted          | AMAX   | Digital output MAX  |
| Ā         | Switching Output (NC)                      | W        | Trigger Input                | AOK    | Digital output OK   |
| V         | Contamination/Error Output (NO)            | O        | Analog Output                | SY In  | Synchronization In  |
| ṽ         | Contamination/Error Output (NC)            | O-       | Ground for the Analog Output | SY OUT | Synchronization OUT |
| E         | Input (analog or digital)                  | BZ       | Block Discharge              | Out    | Brightness output   |
| T         | Teach Input                                | AWV      | Valve Output                 | M      | Maintenance         |
| Z         | Time Delay (activation)                    | a        | Valve Control Output +       |        |                     |
| S         | Shielding                                  | b        | Valve Control Output 0 V     |        |                     |
| RxD       | Interface Receive Path                     | SY       | Synchronization              |        |                     |
| TxD       | Interface Send Path                        | E+       | Receiver-Line                |        |                     |
| RDY       | Ready                                      | S+       | Emitter-Line                 |        |                     |
| GND       | Ground                                     | ≡        | Grounding                    |        |                     |
| CL        | Clock                                      | SnR      | Switching Distance Reduction |        |                     |
| E/A       | Output/Input programmable                  | Rx +/-   | Ethernet Receive Path        |        |                     |
|           | IO-Link                                    | Tx +/-   | Ethernet Send Path           |        |                     |
| PoE       | Power over Ethernet                        | Bus      | Interfaces-Bus A(+)/B(-)     |        |                     |
| IN        | Safety Input                               | La       | Emitted Light disengageable  |        |                     |
| OSSD      | Safety Output                              | Mag      | Magnet activation            |        |                     |
| Signal    | Signal Output                              | RES      | Input confirmation           |        |                     |
| Bl..D +/- | Ethernet Gigabit bidirect. data line (A-D) | EDM      | Contactorm Monitoring        |        |                     |
| EN0RS422  | Encoder 0-pulse 0-0 (TTL)                  | ENAR5422 | Encoder A/Ā (TTL)            |        |                     |
|           |  | ENBR5422 | Encoder B/B̄ (TTL)           |        |                     |

### Wire Colors according to DIN IEC 757

|      |              |
|------|--------------|
| BK   | Black        |
| BN   | Brown        |
| RD   | Red          |
| OG   | Orange       |
| YE   | Yellow       |
| GN   | Green        |
| BU   | Blue         |
| VT   | Violet       |
| GY   | Grey         |
| WH   | White        |
| PK   | Pink         |
| GNYE | Green/Yellow |

