
Safety Light Curtain Hand Protection

SG4-30IE075C1



- **Completely integrated electronics**
- Fix blanking, floating blanking and reduced resolution, cascading, muting
- Serial interface

These safety light curtains are distinguished by their compact design. They are also equipped with numerous auxiliary functions, allowing for adaptation to the respective application in a highly individualized fashion. The adequate mounting angle BEF-SET-33 is included in the delivery.

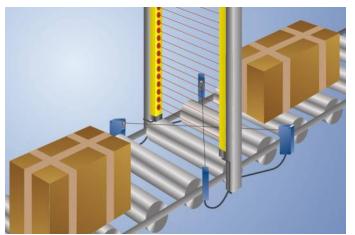

Technical Data

Optical Data	
Range	0,520 m
Safety Field Height (SFH)	780 mm
Resolution	30 mm
Light Source	Red Light
Opening Angle	± 2,5 °
Electrical Data	
Sensor Type	Receiver
Supply Voltage	24 V DC
Current Consumption (Ub = 24 V)	300 mA
Response Time	12 ms
Temperature Range	-2050 °C
Storage temperature	-2570 °C
No. Safety Outputs (OSSDs)	2
Safety Output Voltage Drop	< 2,5 V
PNP Safety Output/Switching Current	300 mA
Signal Outputs	1
Signal Output Voltage Drop	< 2,5 V
Signal Output/Switching Current	200 mA
Short Circuit and Overload Protection	yes
Reverse Polarity Protection	yes
Interface	RS-485
Protection Class	III
Mechanical Data	
Housing Material	Aluminum
Disk Material	Polycarbonate
Degree of Protection	IP67
Connection	M12 × 1; 8-pin
Safety-relevant Data	7.7
ESPE Type (EN 61496)	4
Safety Category (EN ISO 13849-1)	4
Performance Level (EN ISO 13849-1)	PL e
PFHD	3,08 × E-8 1/h
Service Life TM (EN ISO 13849-1)	20 a
Function	
Hand Protection	yes
Restart Inhibit	yes
Contactor Monitoring	yes
Cascading	yes
Fix Blanking	yes
Floating Blanking	yes
Reduced Resolution	yes
Serial Communication	yes
Connection Table No.	28
Control Panel No.	S4
Suitable Connection Technology No.	88 88s
Suitable Mounting Technology No.	700

Suitable Emitter


SG4-30IS075C1

Complementary Products


Laser Alignment Tool SZ0-LAH1 Muting Indicator SM0-00CA000C1 Path-Folding Mirror Z2UG003 Protection Column with Path-Folding Mirror SZ000EU125NN01 Protection Column with Protective Screen SZ000EG125NN01 Safety Relay SG4-00VA000R2, SR4B3B01S, SR4D3B01S Software

Software wsafe



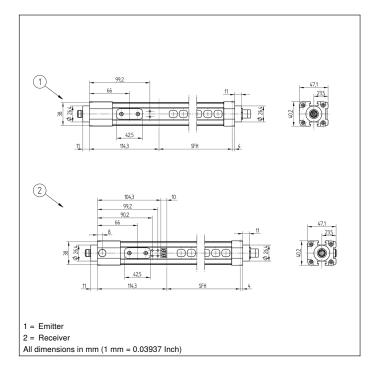

Ctrl. Panel



- 03 = Error Indicator
- 20 = Enter Button
- 52 = OSSD ON
- 53 = OSSD OFF
- 55 = Blanking
- 56 = Dip-Switch
- 60 = Display











