


Connection Cable

M12 × 1; 8-pin, X-coding - RJ45; 8-pin

ZC1V003



Part Number

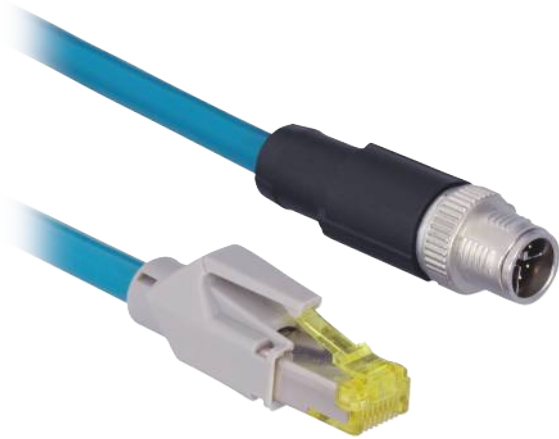

Technical Data

Mechanical Data	
Connection 1	Plug, straight
Connection mode 1	M12 × 1, 8-pin, X-cod.
Connection 2	Plug, straight
Connection mode 2	RJ45, 8-pin
Torque	M12: 0,4 Nm
Cable Length	5 m
Diameter Cable	6,9 mm
Wire cross-section	0,14 mm ²
Degree of Protection	IP67
Temperature Range	-10...60 °C
Material Cable Jacket	PUR
Material Wire Isolation	PP
Material Cap Nut	Zinc diecasting, nickel-plated
Category	CAT 5E
Screened	yes
Halogen-free	yes
Drag Chain Suitable	yes
Bending radius (fixed installation)	4 × d
Bending radius (used in motion)	8 × d
Travel speed (with 5 m horizontal travel distance)	3 m/s
Acceleration	5 m/s ²
Bending cycles	5000000
Packaging unit	1 Piece
Connection Diagram No.	S85
Connection Technology No.	50

- Drag chain suitable
- PUR, straight
- Screened

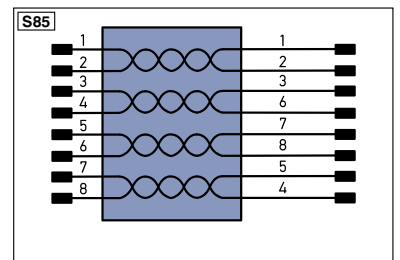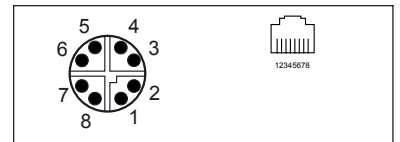

Legend			
+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	Ü	Test Input inverted
Ä	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	Q	Analog Output
∇	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	AWV	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	E+	Receiver-Line
RDY	Ready	S+	Emitter-Line
GND	Ground	≐	Grounding
CL	Clock	SrR	Switching Distance Reduction
E/A	Output/Input programmable	Rx+/-	Ethernet Receive Path
IO-Link	IO-Link	Tx+/-	Ethernet Send Path
PoE	Power over Ethernet	Bus	Interfaces-Bus A(+)/B(-)
IN	Safety Input	La	Emitted Light disengageable
OSSD	Safety Output	Mag	Magnet activation
Signal	Signal Output	RES	Input confirmation
BI-D+/-	Ethernet Gigabit bidirect. data line (A-D)	EDM	Contactor Monitoring
EN0PMS22	Encoder 0-pulse 0-0 (TTL)	EN0PMS22	Encoder A/Ä (TTL)
		EN0PMS22	Encoder B/ß (TTL)
		ENa	Encoder A
		ENb	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		AOk	Digital output OK
		SY in	Synchronization In
		SY OUT	Synchronization OUT
		Öut	Brightness output
		M	Maintenance
			Wire Colors according to DIN IEC 757
			BK Black
			BN Brown
			RD Red
			OG Orange
			YE Yellow
			GN Green
			BU Blue
			VT Violet
			GY Grey
			WH White
			PK Pink
			GNYE Green/Yellow

Specifications are subject to change without notice