OC539120

CAMERA SENSORS • CAMERA SENSORS

Camera sensors are used to simultaneously check various properties of objects (e.g., completeness, dimensional accuracy, position, damages, labeling). This takes place independent of the component position virtually in real time. Camera sensors are image processing systems that combine image sensor and image processing computer with image processing software in a metal housing. Depending on the version, lens and illumination unit are also integrated in the housing or must be additionally mounted. The camera sensors are set using an intuitive software program. On the device, object-specific check programs can be stored that contain the respective feature checks. These programs can be activated depending on the object that is to be inspected. The rugged housing design makes possible use under harsh environmental conditions.



MECHANICAL DATA

5 °C 50 °C
IP67
Aluminium
PMMA
113 mm
38 mm
53 mm
32
8 V 30 V
100 mA
100 fps
208 mA
5
5
12
4
5
18 V 30 V
5 W
Yes
Application software
Yes
M12-connector
Programmable/configurable
PNP
Yes
Yes

IPF ELECTRONIC


OPTICAL DATA

Yes
Yes
Yes
Yes
10mm
Yes
Yes
CMOS(1/3")
White light
50 fps
50 mm
Yes
Yes
752x480
Yes

OTHER DATA


Air humidity	0 90% noncondensing
Risk groups	1
Shock resistance in acc. with EN 60068-2-27	Yes
Vibration resistance in acc. with IEC 60068-2-6 / IEC 60068-2-64	Yes

CONNECTION



Colors: A: 1 = BN (brown), 2 = BU (blue), 3 = WH (white), 4 = GN (green), 5 = PK (pink), 6 = YE (yellow), 7 = BK (black), 8 = GY (gray), 9 = RD (red), 10 = VT (violet), 11 = GY/PK (gray/pink), 12 = RD/BU (red/blue) B: 1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)**Functions:** A: 1 = L+, 2 = L-, 3 = trigger, 4 = out 1, 5 = In 2, 6 = out 2, 7 = out 3, 8 = In 3, 9 = out 4/ RS485, 10 = In 4, 11 = in 5, 12 = out 5/RS485 B: 1 = TD+, 2 = TD-, 3 = RX+, 4 = RX-

DIMENSIONAL DRAWING

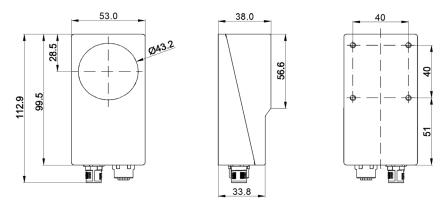

ipf electronic gmbh • Kalver Straße 25 - 27 • 58515 Lüdenscheid - Germany | Tel +49 2351 9365-0 • Fax +49 2351 9365-19 | info@ipf-electronic.com • www.ipf-electronic.com



INSTALLATION

DISPOSAL



Mounting / Installation may only be carried out by a qualified electrician!



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!