


MIRO TR 24VDC 20KHZ IN<1MA OPTO-COUPLER MODULE




IN: 30 VDC - OUT: 48 VDC / 0.2 A

Transistor 0.2 A
24 V DC
Control current 0.1 mA (5 V DC)
Screw terminals

[Link to Product](#)

Illustration

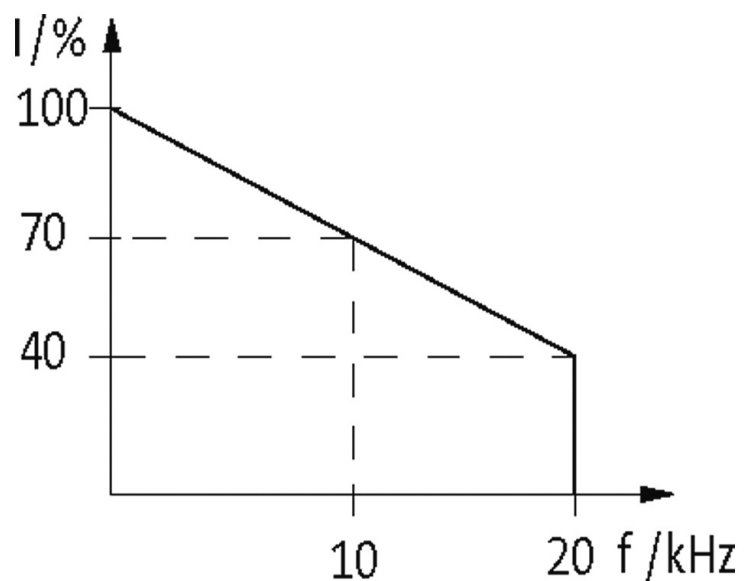

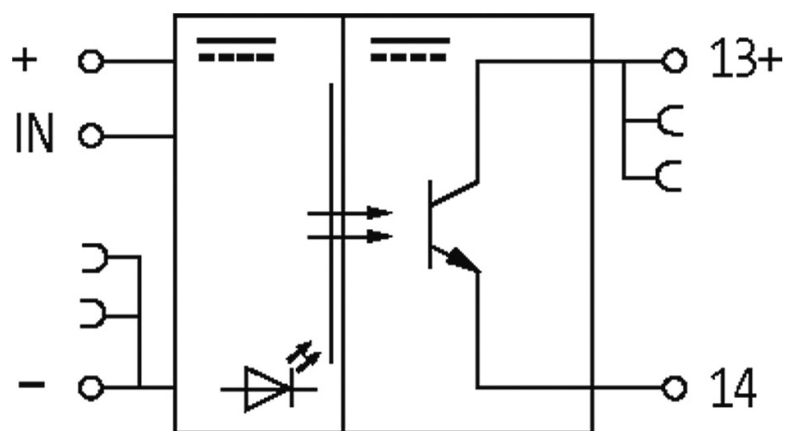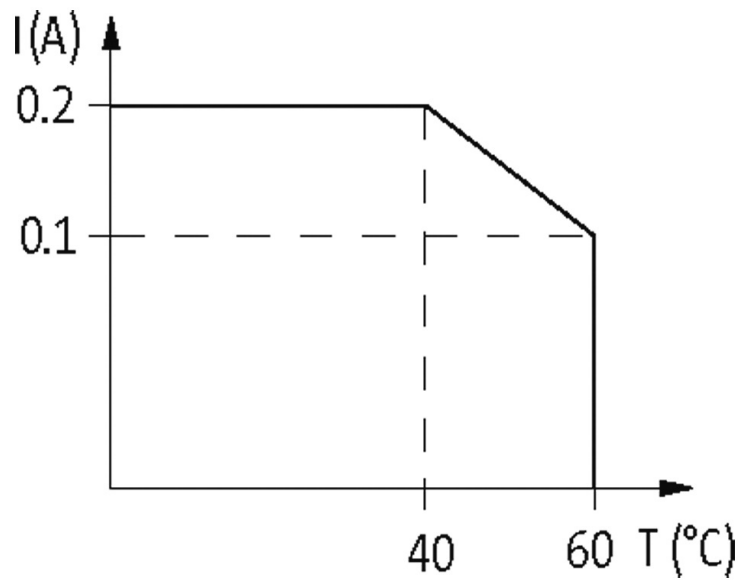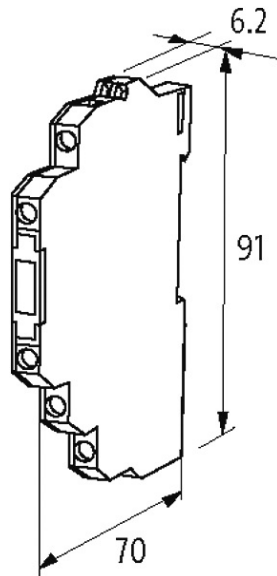

Product may differ from Image

Approvals



Input

Voltage range ON	15...30 V DC
Voltage range OFF	0...2 V DC
Control current	0.1 mA (5 V DC)
LED display	LED (yellow)

General data

Test isolation voltage	3.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C
Dimensions H x W x D	91x6.2x70 mm

Output

Switching voltage	5...48 V DC
Switching current per output	0.1 mA...0.2 A
Saturation voltage (across output)	max. 1.2 V DC
Leakage current (output is open)	max. 0.1 mA
Switching frequency	max. 20 kHz
Switching time ON/OFF	10/18 µs

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879026857
eClass	27371604
Packaging unit	1