


MIRO TR 24VDC 24VDC 10A SK OPTO-COUPLER MODULE



IN: 53 VDC - OUT: 48 VDC / 10 A

Transistor 10 A
 24 V DC
 Short-circuit and overload protected
 pulse switching
 Screw terminals

[Link to Product](#)

Illustration

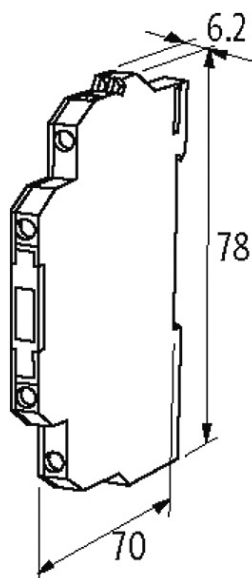

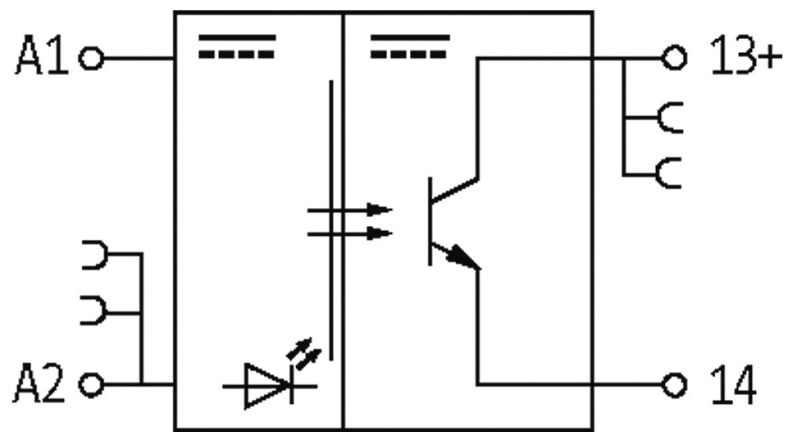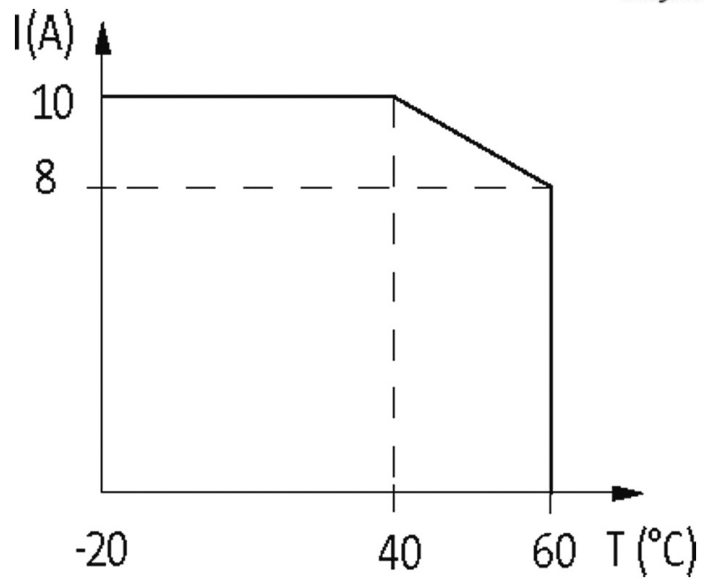

Product may differ from Image

Approvals



Input

Voltage range ON	10...53 V DC
Voltage range OFF	0...5 V DC
Control current	10 mA
LED display	LED (yellow)

General data

Dimensions H × W × D	78×6.2×70 mm
Test isolation voltage	2.75 kV
Mounting method	DIN-rail mountable (EN 60715)
Housing	Black plastic, flame retardant
Temperature range	-20...+60 °C

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Output

Switching voltage	5...48 V DC
Switching current per output	1 mA...10 A, short-circuit and overload protected (pulse switching)
Saturation voltage (across output)	max. 0.12 V DC
Leakage current (output is open)	max. 25 μ A
Switching time ON/OFF	2/5 ms (10 A load)
Switching frequency	max. 1/0.1 Hz (resist./ind.)

Commercial data

country of origin	CZ
customs tariff number	85414090
EAN	4048879026796
eClass	27371604
Packaging unit	1