
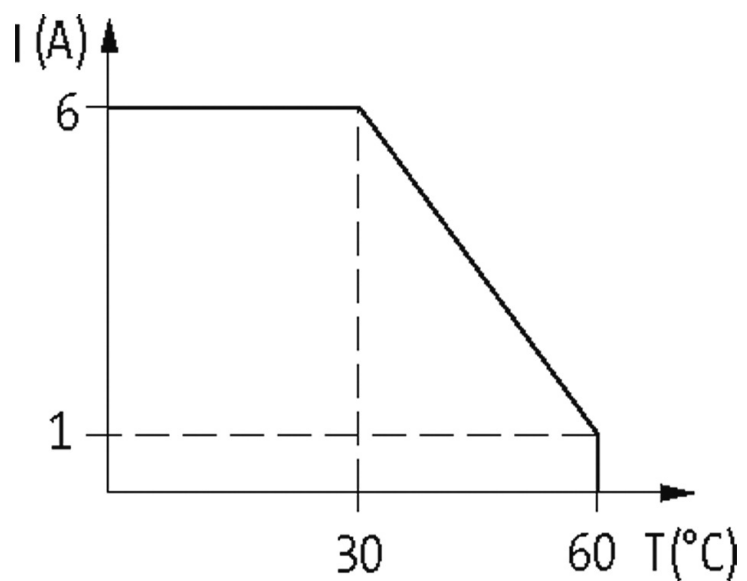
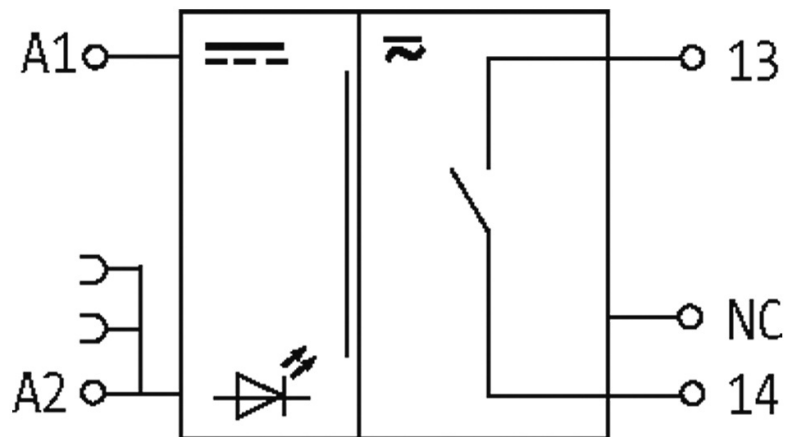
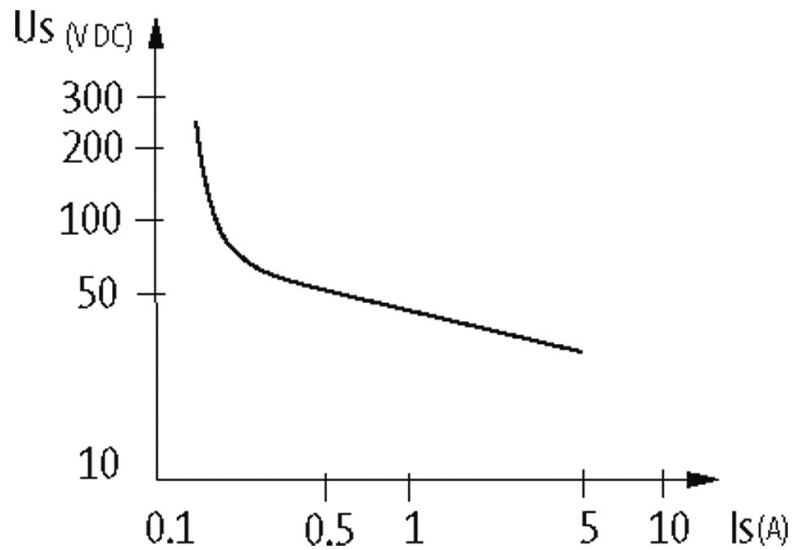


MIRO 6,2-1OUTPUT-REL.24VDC-1S-FK(5P)

MIRO 6.2 24VDC-1S OUTPUT RELAY

1 NO contact
with solder terminal
24 V DC
Spring clamp terminals

[Link to Product](#)**Illustration**

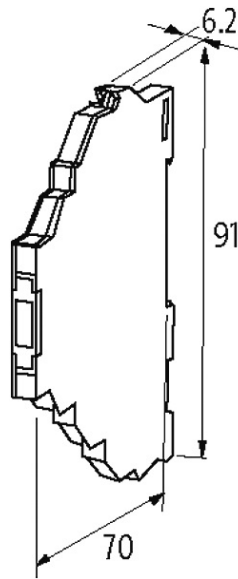

common return for NC

Product may differ from Image

Approvals



Input

Connection voltage - current	24 V DC (19.2...30 V DC) - 14 mA
LED display	LED (green)

Utilization category

AC-12	6 A (24/110/230 V AC)
AC-15	3 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

General data

Mech./elect. life	20 000 000 switching cycles/load dependent
Test isolation voltage	4 kV; safe separation (EN 60947-1)
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+55 °C
Dimensions H x W x D	91x6.2x70 mm

Output

Switching voltage	max. 250 V AC/DC
Switching current per output	max. 6 A
Min. load current	100 mA (12 V DC)
Power rating (voltage dependent)	max. 1 500 VA/120 W
Switching frequency	max. 10 Hz
Contact material	Ag Sn O2
Energize/release/contact bounce time	10/15/1.5 ms

Commercial data

country of origin	CZ
customs tariff number	85364900
EAN	4048879022200
eClass	27371001
Packaging unit	1