

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED


IN: 230/400+/- 15VAC OUT: :24V/1ADC


Current: 1 A
Output rating: 24 W
with MES DIN-rail adapter

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)

Illustration

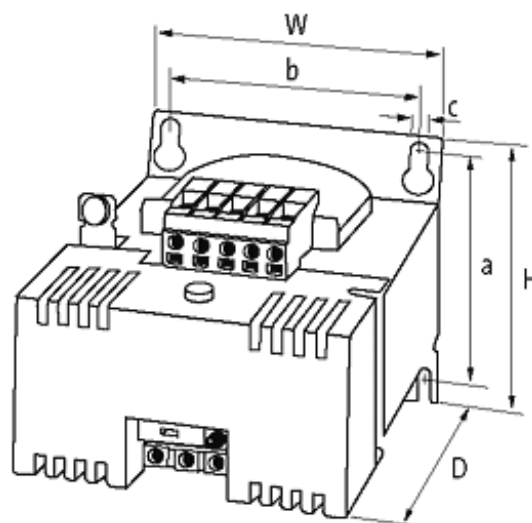

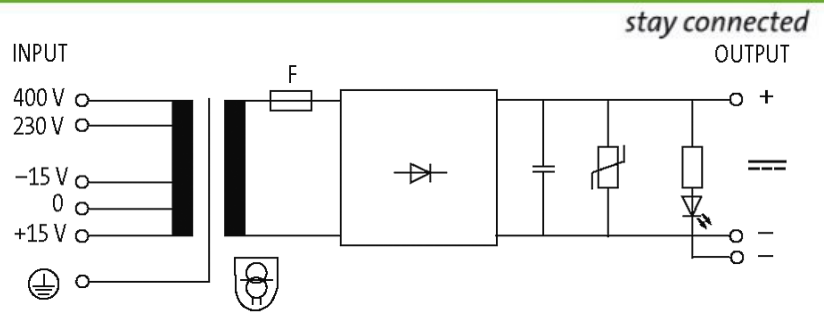

Product may differ from Image

Approvals



Input

Input voltage	230/400 ±15 V AC
Input current	0.25 A (230 V AC); 145 A (400 V AC)
Input fuse (external)	0.4 A (T) (230 V AC); 0.25 A (T) (400 V AC)
Frequency	50...60 Hz

General data

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting
Dimensions H × W × D	64×78×120 mm
Fixing centers a × b × c	47.5×56×4.8 mm
Temperature range	-20...+60 °C, no condensation

Output

Output voltage	24 V DC (SELV)
Output current (T a 60/40 °C)	max. 1 A (230 V AC); 1.5 A (400 V AC)
Ripple	max. 5%rms
Output fuse	3 A (automotive fuse FKS)
Output filter	LED, VDR and smoothing capacitor

Commercial data

country of origin	CZ
customs tariff number	85044090
EAN	4048879065757
eClass	27049002
Packaging unit	1