

ASi-5 Motor Module for NORD NORDAC FLEX, IP67, M12, 1M/4I/2O

ASi-5 Motor Module to control NORD NORDAC FLEX


Cyclic writing of speed and ramps possible

4 x M12 connectors

High protection class IP67



(figure similar)

Figure	Type	Drive ⁽¹⁾	Number of drives	Inputs digital	Outputs digital	Input voltage (sensor supply) ⁽²⁾	Output voltage (actuator supply) ⁽³⁾	ASi connection ⁽⁴⁾	ASi address ⁽⁵⁾	Art. no.
	IP67, 4 x M12, ASi-5	NORD NORDAC FLEX	1	4	2	out of ASi	out of AUX	ASi profile cable	1 ASi-5 slave	BWU4371

- (1) **Drive:**
"NORD NORDAC FLEX": Motor module to control geared motors with frequency inverters.
- (2) **Input voltage (sensor supply):** inputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, inputs shall not be connected to earth or to external potential.
- (3) **Output voltage (actuator supply):** outputs are supplied by ASi or by AUX (auxiliary 24 V power). If supplied by ASi, outputs shall not be connected to earth or to external potential
- (4) **ASi connection:** the connection to ASi as well to AUX (auxiliary 24 V power) is made via yellow resp. black ASi profile cable with piercing technology or via M12 socket (in IP20 via clamps).
- (5) **ASi address:** AB slave (max. 62 AB slaves/ASi network), 2 AB slaves (max. 31 modules with 2 AB slaves), single slaves (max. 31 single slaves/ASi network) ASi-5 slave (max. 62 ASi-5 slaves/ASi network), mixed use allowed (upon request, slaves are available with specific ASi slave profiles).

Article no.	BWU4371
Connection	
ASi / AUX connection	profile cable and piercing
Periphery connection	M12, Y wiring
ASi	
Address	1 ASi-5 address
Required Master profile	≥M5
Since ASi specification	5
Operating voltage	30 V (18 ... 31,6 V)
Max. current consumption	210 mA
Max. current consumption without sensor/ actuator supply	65 mA
Process data width	6 bytes
AUX	
Voltage	24 V (18 ... 30 V)
Max. current consumption	3 A


ASi-5 Motor Module for NORD NORDAC FLEX, IP67, M12, 1M/4I/2O

Article no.		BWU4371
Input		
Number		4
Power supply		out of ASi
Sensor supply		short-circuit and overload protected according to EN 61131-2
Power supply of attached sensors	up to +40 °C	120 mA ⁽¹⁾
	at +55 °C	
	at +70 °C	50 mA ⁽¹⁾
Switching threshold		< 5 V (low), > 15 V (high)
Output		
Number		2
Power supply		out of AUX
Output		short-circuit and overload protected according to EN 61131-2
Max. output current	up to +40 °C	1 A per output, $\Sigma(\text{Out})$ 3 A ⁽²⁾
	at +55 °C	
	at +70 °C	0,5 A per output, $\Sigma(\text{Out})$ 1,5 A ⁽²⁾
NORD Motors Interface		
Number		1
Interface		CANnord
Baud rates		9600 Bit/s
Power supply		out of AUX
Fuse		short-circuit and overload protected according to EN 61131-2
Max. current	up to +40 °C	1 A per motor, $\Sigma(\text{Out})$ 3 A ⁽²⁾
	at +55 °C	
	at +70 °C	0,5 A per motor, $\Sigma(\text{Out})$ 1,5 ⁽²⁾
Visualization		
LED ASI (green)	on: ASi voltage flashing: ASi voltage on, but peripheral fault ⁽³⁾ or address 0 off: no ASi voltage	
LED FLT (red)	on: ASi node offline flashing: peripheral fault ⁽³⁾ off: ASi node online	
LED AUX (green)	on: 24 V _{DC} AUX off: no 24 V _{DC} AUX	
LEDs I1 ... I4 (yellow)	state of inputs I1 ... I4	
LEDs O1, O2 (yellow)	state of outputs O1, O2	
LED M1 (yellow)	CANnord communication active	


ASi-5 Motor Module for NORD NORDAC FLEX, IP67, M12, 1M/4I/2O

Article no.	BWU4371
Environment	
Applied standards	EN 61000-6-2 EN 61000-6-4 EN 60529
Can be used in passively safe paths up to SIL3/PLe	yes ⁽⁴⁾
Operating altitude	max. 2000 m
Ambient operating temperature	-30 °C ... +55 °C (up to max. +70 °C) ⁽¹⁾ ⁽²⁾ ⁽⁵⁾
Storage temperature	-25 °C ... +85 °C
Housing	plastic, for DIN rail mounting or for screw mounting ⁽⁶⁾
Protection category	IP67 ⁽⁷⁾
Pollution Degree	2
Tolerable loading referring to humidity	according to EN 61131-2
Max. tolerable shock load	30g, 11 ms, acc. EN 61131-2
Max. tolerable vibration stress	5 ... 8 Hz 50 mm _{pp} /8 ... 500 Hz 6g, acc. EN 61131-2
Isolation voltage	≥500 V
Weight	100 g
Dimensions (B / H / T in mm)	45 / 80 / 56

(1)

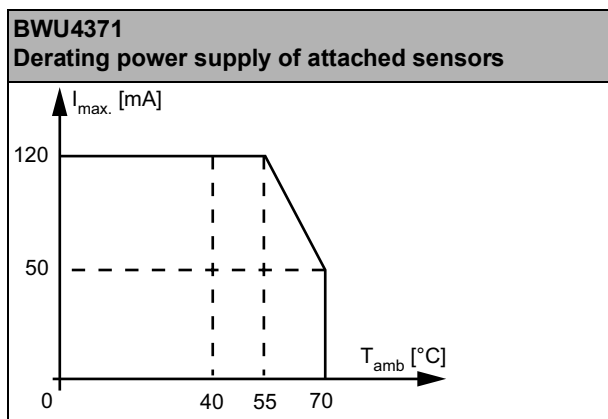

(2)

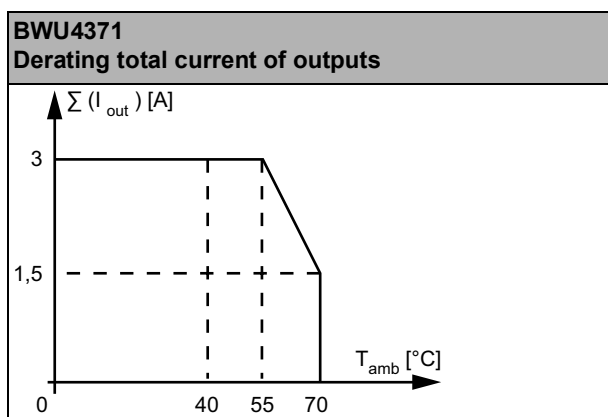

(3) **See table "Peripheral fault indication"**

(4) The module is suitable for use in passively safe paths because an exclusion of errors can be assumed for the connection of the two potentials, ASi and AUX.


(5) Maximum ambient operating temperature +55 °C according UL certificate for the use in the USA and Canada

(6) Depending on substructure module (see accessories). The substructure module is not included in the scope of delivery.

(7) Protection category IP67 can only be achieved if all open connections are sealed with suitable end caps fulfilling the same protection category.

ASi-5 Motor Module for NORD NORDAC FLEX, IP67, M12, 1M/4I/2O

UL-specifications (UL508) BWU4371	
External protection	An isolated source with a secondary open circuit voltage of $\leq 30 V_{DC}$ with a 3 A maximum over current protection. Over current protection is not required when a Class 2 source is employed.
In general	UL mark does not provide UL certification for any functional safety rating or aspects of the above devices.

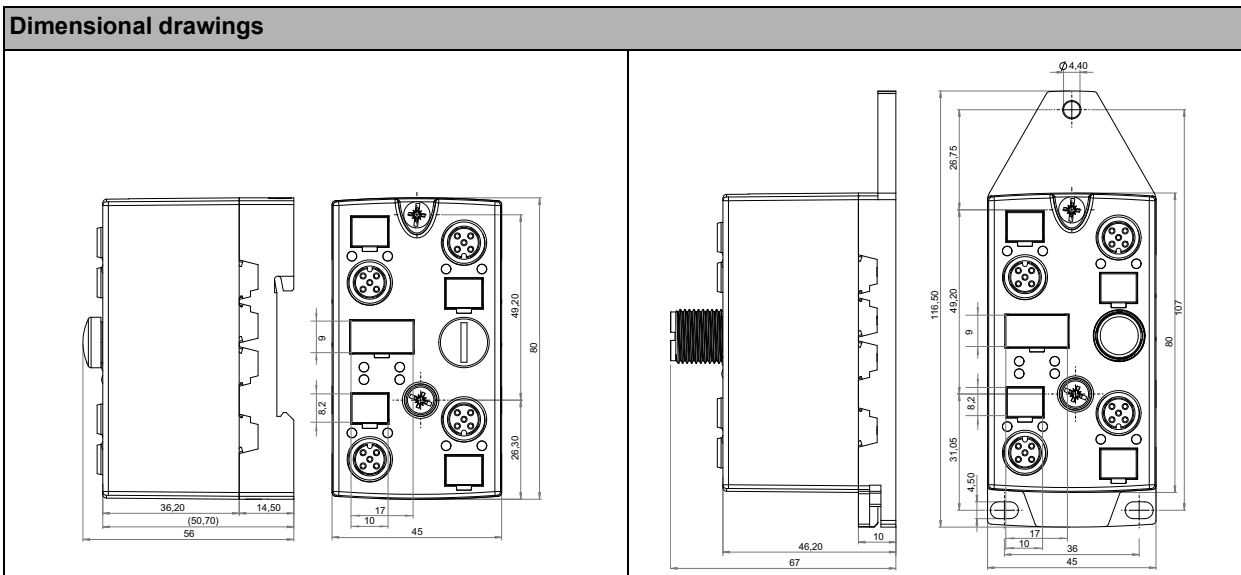

Article no.	Peripheral fault indication				
	Overload sensor supply	Output short circuited	AUX voltage missing	Communication error	Motor error
BWU4371	•	•	•	•	•

Programming (Bit-setting of ASi process data image)

Article no.	Byte	Bit											
		D7	D6	D5	D4	D3	D2	D1	D0				
BWU4371	Digital input data												
	0	reserved								I4	I3	I2	I1
	1	motor ready	motor running	at reference	direction of rotation	motor error	motor specific error	reserved					
	2	actual speed, high byte (0 ... 100%), UINT16											
	3	actual speed, low byte (0 ... 100%), UINT16											
	4	actual current (mA), high byte, UINT16											
5	actual current (mA), low byte, UINT16												

Article no.	Byte	Bit									
		D7	D6	D5	D4	D3	D2	D1	D0		
BWU4371	Digital output data										
	0	reserved								O2	O1
	1	enable	start/stop	direction of rotation	brake	reset	free wheel	reserved			
	2	speed setpoint, high byte (0 ... 100%), UINT16									
	3	speed setpoint, low byte (0 ... 100%), UINT16									
	4	ramp (ms), high byte, UINT16									
5	ramp (ms), low byte, UINT16										

ASi-5 Motor Module for NORD NORDAC FLEX, IP67, M12, 1M/4I/2O

Pin assignment

Signal name	Explanation
I _x	Digital input x
O _x	Digital output x
CAN-H	Communication with motor, positive pole
CAN-L	Communication with motor, negative pole
24 V _{ext out}	Power supply, out of external voltage, positive pole (AUX, actuator supply)
0 V _{ext out}	Power supply, out of external voltage, negative pole (AUX, actuator supply)
24 V _{ext in}	Input voltage, positive pole (AUX+)
0 V _{ext in}	Input voltage, negative pole (AUX-)
ASi+	ASi network, positive potential
ASi-	ASi network, negative potential
24 V _{out of ASi}	Power supply, out of ASi, positive pole (sensor supply)
0 V _{out of ASi}	Power supply, out of ASi, negative pole (sensor supply)
n.c.	not connected

Connections

Article no.	M12 Connection	Marking	Pin1	Pin2	Pin3	Pin4	Pin5	
BWU4371	X1	I1/I2	24 V out of ASi	I2	0 V out of ASi	I1	n.c.	
	X2	I3/I4	24 V out of ASi	I4	0 V out of ASi	I3	n.c.	
	X3	O1/O2	0 V _{ext out}	O2	0 V _{ext out}	O1	n.c.	
	X4	M1 (motor)	n.c.	24 V ext out	0 V _{ext out}	CAN-H	CAN-L	
	ADDR (protection cap)	connection for ASi-5 addressing plug						

Accessories:

- ASi substructure module for 4-channel module in 45 mm-housing (art. no. BW2349)
- ASi substructure module (CNOMO) 4-channel module in 45 mm-housing (art. no. BW2350)
- Universal protection cap ASi-5/ASi-3 for M12 sockets, IP67 (article no. BW4056)
- Passive Distributor ASi/AUX to 2 x M12 socket, internal protection via changeable 4 A slow-blow fuses (article no. BWU3087)
- ASi-5/ASi-3 Address Programming Device (art. no. BW4708)
- It is recommended to use NORD „SK TIE4-M12-SYSS“ M12 BUS system connector to connect the motor interface with the module.