

**ITEM 095735 CET1-AX-LRA-00-50X-SA**


Description	Technical data	Accessories	Downloads
-------------	----------------	-------------	-----------



**Features**

- › Read head with guard locking
- › Locking force up to 6500 N
- › Up to category 4/PL e according to EN ISO 13849-1
- › With plug connector M12
- › 2 LEDs (1 freely configurable)
- › Approach direction A (default setting on delivery)

**Approach direction**



- › Figure  
Horizontal  
Can be adjusted in 90° steps

**Solenoid operating voltage**

› DC 24 V +10% -15%

## Guard locking type

**CET1 Closed-circuit current principle**, guard locking by spring force.  
Release by applying voltage to the guard locking solenoid.


## LED function display

**LED rot** illuminates when solenoid is switched on

**LED grün** freely configurable

## Category according to EN ISO 13849-1

**Important:** The category in accordance with EN ISO 13849-1 is dependent on the evaluation unit used and on the installation position.

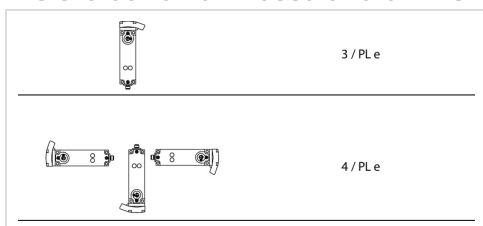

› Figure

## Notes

- › Special connection cables from EUCHNER are required for the connection. Please take into account in the order!
- › The device may be operated only in conjunction with the actuator CET-A-.... The actuator must be ordered separately.

## Auxiliary release

Is used for releasing the guard locking with the aid of a tool. The auxiliary release must be sealed to prevent tampering (for example with sealing lacquer).

## Approvals



## Mechanical values and environment

Housing material	Slide	Stainless steel
	Safety switch	Die-cast aluminum
Weight	Net	1 kg

Ambient temperature	At $U_B = 24V$ DC	-20 ... 55 °C
Degree of protection		IP67 <b>[1]</b>
Mechanical life		$1 \times 10^6$
Installation position		Any <b>[2]</b>
Degree of freedom	X	$\pm 5$ mm
	Y	$\pm 5$ mm
	Z	$\pm 4$ mm
Switching frequency		1 Hz <b>[3]</b>
Connection		1 plug connector M12, 8-pin
Approach speed		20 m/min
Guard locking principle		Closed-circuit current principle
Locking force $F_{max}$		6500 N
Locking force $F_{Zh}$		5000 N

### Electrical connection ratings


Operating voltage DC	LED	24 V DC -15% ... 15% Reverse polarity protected
Current consumption	$I_{CM}$	480 mA Solenoid
	LED	max.6 mA
Solenoid operating voltage DC	$U_{CM}$	24 V DC -15% ... +10% Reverse polarity protected, regulated, residual ripple < 5%, PELV
Rated insulation voltage $U_i$		50 V
Rated impulse withstand voltage $U_{imp}$		1,5 kV
Power consumption	Solenoid	12 W
Solenoid duty cycle		100 %
Degree of contamination (external, according to EN 60947-1)		3
Safety class	EN IEC 61140	III

**[1]** With screwed tight plug connector


**[2]** Preferably head downward

**[3]** This value can vary depending on the evaluation unit used. See system documentation of the related evaluation unit.

### Dimension drawing

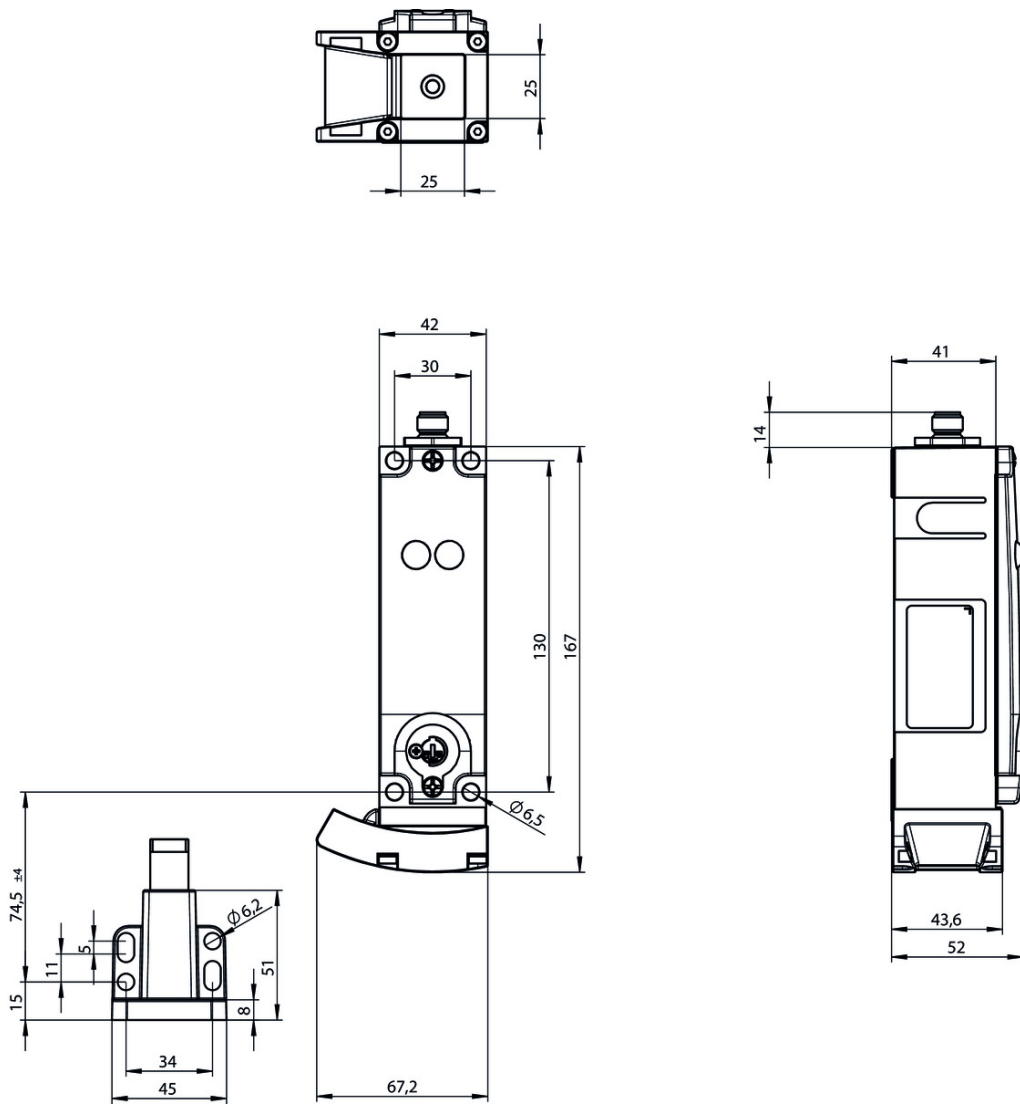

### Block diagram

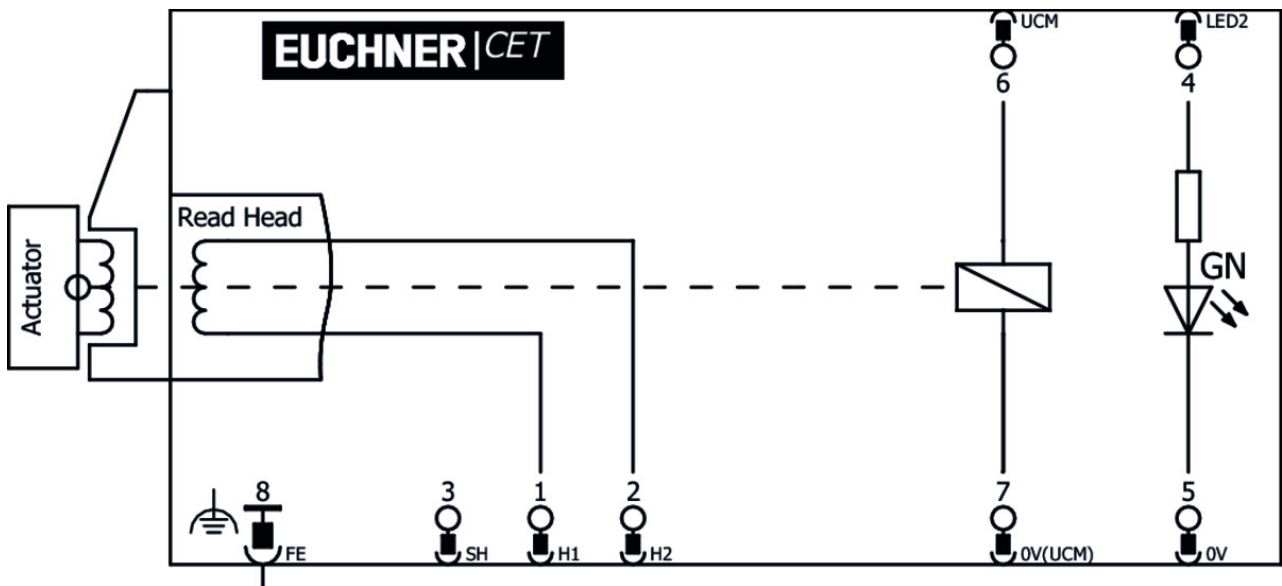

## Actuator

---

### Actuator CET-A-BWK-50X



#### **096327** CET-A-BWK-50X

##### Features

- › Actuator for read head/safety switch CET
  - › Four safety screws M5x16 included
- 

## Bolt

---

### Bolt CET-A-C



#### **104309** RIEGEL CET-A-C

##### Features

- › Steel bolt
  - › In combination with CET
  - › For left or right hinged doors
  - › Can be locked in open position with padlocks
- 



#### **109672** RIEGEL CET-A-C-C2308

##### Features

- › Steel bolt
  - › In combination with CET
  - › For left or right hinged doors
  - › Can be locked in open position with padlocks
  - › Bolt without door stop, suitable for swing doors
- 

## Connection material

---

### Connection cable with plug connector M12, 8-pin, 10m



#### **099633** C-M12F08-07X025PV10,0-MA-099633

##### Features

- › M12 female plug, 8-pin
  - › Straight plug connector
  - › PVC cable
  - › Cable length 10 m
  - › With flying lead
- 



#### **102218** C-M12F08-07X025PU10,0-MA-102218

##### Features

- › M12 female plug, 8-pin
  - › Straight plug connector
  - › PUR cable
  - › Cable length 10 m
  - › With flying lead
-

- ▼ Connection cable with plug connector M12, 8-pin, 20m



**099634** C-M12F08-07X025PV20,0-MA-099634

▼ Features

- › M12 female plug, 8-pin
  - › Straight plug connector
  - › PVC cable
  - › Cable length 20 m
  - › With flying lead
- 

- ▼ Connection cable with plug connector M12, 8-pin, 25m



**103115** C-M12F08-07X025PV25,0-MA-103115

▼ Features

- › M12 female plug, 8-pin
  - › Straight plug connector
  - › PVC cable
  - › Cable length 25 m
  - › With flying lead
- 



**103782** C-M12F08-07X025PU25,0-MA-103782

▼ Features

- › M12 female plug, 8-pin
  - › Straight plug connector
  - › PUR cable
  - › Cable length 25 m
  - › With flying lead
- 

- ▼ Connection cable with angled plug connector M12, 8-pin, 10m



**100456** C-M12F08-07X025PV10,0-MA-100456

▼ Features

- › M12 female plug, 8-pin
  - › Angled plug connector
  - › PVC cable
  - › Cable length 10 m
  - › With flying lead
- 

- ▼ Connection cable with angled plug connector M12, 8-pin, 20m



**105071** C-M12F08-07X025PV20,0-MA-105071

▼ Features

- › M12 female plug, 8-pin
  - › Angled plug connector
  - › PVC cable
  - › Cable length 20 m
  - › With flying lead
- 

## Function expansion

---

- ▼ Mechanical key release for CET read head/switch



### **098850** SCHLUESSEL-HILFSENTRIEGELUNG

#### ▼ Features

- › Identical locking
  - › Key removable in “unlocked” and “locked” positions
- 

#### ▼ Emergency unlocking for CET



### **103714** NOTENTSPERRUNG CET

#### ▼ Cover for read head and actuator CET



### **098808** CET ABDECKUNG RECHTS

#### ▼ Features

- › Cover for read heads / safety switches CET and actuators CET
  - › For approach direction A
- 



### **098807** CET ABDECKUNG LINKS

#### ▼ Features

- › Cover for read heads / safety switches CET and actuators CET
  - › For approach direction C
- 

#### ▼ Double ramp for safety switch/read head CET



### **114091** CET-DR

#### ▼ Cover for actuator CET



### **124979** AM-C-124979

#### ▼ Features

- › Cover for actuator CET
  - › Horizontal and vertical fastening option on the actuator
  - › Mounting using 4 screws M5x16 (included with the actuator)
  - › Not suitable in combination with lockout bar for actuator CET
- 

#### ▼ Lockout mechanism for CET actuator



### **122609** AE-L-CET-122609

#### ▼ Features

- › Prevents unintentional closing of the door
  - › Can be secured with padlocks
  - › Not suitable in combination with cover AM-C for actuator CET
- 



### **156429** AE-L-CET-156429

#### ▼ Features

- › Prevents unintentional closing of the door
  - › Can be secured with padlocks
-

▼ Holder for lockout mechanism CET actuator



**156338** Y-CHN-A1-156338

▼ Features

- › Holder (incl. wire rope) for lockout bar CET

▼ Lockout bar and holder for CET actuators



**155865** AE-SET-LCHN-A1-155865

▼ Features

- › Prevents unintentional closing of the door
- › Can be secured with padlocks

## Mounting accessories

▼ Mounting plate EMP-L... for CET read head/switches



**106695** EMP-L-CET

▼ Features

- › Mounting plate for CET read heads/switches
- › For hinged or sliding doors
- › Suitable for aluminum profiles 40 ... 45 mm
- › Horizontal and vertical mounting
- › Suitable for CET with escape release

▼ Mounting plate EM-P switch for safety switch CET



**126399** AM-P-126399

▼ Features

- › Mounting plate for CET read heads/switches
- › Direct mounting on aluminum profiles of width 30/40/50 mm
- › Suitable for the mounting plates AM-P-126400 and AM-P-126398

▼ Mounting plate EM-P actuator for safety switch CET



**126400** AM-P-126400

▼ Features

- › Mounting plate for CET actuator
- › Suitable for mounting on aluminum profiles of width 30/40/50 mm
- › Suitable for the mounting plates AM-P-126399 and AM-P-126398

▼ Mounting plate EM-P handle for safety switch CET



**126398** AM-P-126398










▼ Features

- › Mounting plate with handle (handle included)
- › For hinged or sliding doors
- › Horizontal and vertical assembly circuits possible
- › Suitable for aluminum profiles of width 30/40/50 mm
- › Suitable for the CET mounting plates AM-P-126399 and AM-P-126400









## Instructions

### Manual de instrucciones Cabeza de lectura CET-AX con bloqueo y monitorización de bloqueo

	Doc. no.	Version	Language	Download
Betriebsanleitung Lesekopf CET-AX mit Zuhaltung und Zuhaltungsüberwachung Operating Instructions Read Head CET-AX with Guard Locking and Guard Lock Monitoring	2098069	18-07/17	 	 2.0 MB
Mode d'emploi Tête de lecture CET-AX avec interverrouillage et contrôle de verrouillage	2098069	18-07/17		 1.1 MB
Manual de instrucciones Cabeza de lectura CET-AX con bloqueo y monitorización de bloqueo	2098069	18-07/17		 1.1 MB
Istruzioni di impiego, Testina di lettura CET-AX con meccanismo di ritenuta e controllo del meccanismo di ritenuta	2098069	18-07/17		 1.1 MB







## Catalogs

### Transpondercodierte Sicherheitssysteme mit externer Auswertung Transponder-coded safety systems with external evaluation Sistemas de seguridad con codificación por transponder y evaluación externa Systèmes de sécurité à codage par transpondeur avec analyse externe

	Doc. no.	Version	Language	Download
Transpondercodierte Sicherheitssysteme mit externer Auswertung	127596	02-01/18		 3.1 MB
Systèmes de sécurité à codage par transpondeur avec analyse externe	137968	02-01/18		 3.0 MB
Sistemas de seguridad con codificación por transponder y evaluación externa	139969	02-01/18		 3.0 MB
Transponder-coded safety systems with external evaluation	127597	02-01/18		 3.0 MB

## Declaration of conformity

### EU-Konformitätserklärung

	Doc. no.	Version	Language	Download
EU-Konformitätserklärung Declaración UE de conformidad Déclaration UE de conformité Dichiarazione di conformità EU declaration of conformity	2077154	34-01/17	    	 0.5 MB

## CAD data

CAD data for this item on TraceParts