

MZR40700

MAGNETIC SENSORS • SENSORS FOR PNEUMATIC CYLINDERS

For many tasks in the field of automation technology, it is necessary to recognize the motional processes in pneumatic and hydraulic cylinders and to detect the position of the piston with precision. For this, magnetic cylinder sensors are used.



MECHANICAL DATA

Ambient temperature	-25 °C ... 80 °C
Cable length	2 m
Degree of protection (IP)	IP67
Housing design	Cuboid
Housing material	Plastic
Increased ambient temperatures > 80°C	No
Material of cable sheath	PUR (Polyurethane)
Metal housing	No
Mounting access, cylinder groove	From the top
Number of wires	4
Sensor height	3.1 mm
Sensor length	22 mm
Sensor surface position	Center of the device
Sensor width	3.7 mm
Strong vibration / motion	No
Type of rounded groove	3.75mm rounded groove

ELECTRICAL DATA

Contact travel (depending on magnet / air gap)	50 mm
Cross/short circuit identification possible	Yes
Low sensitivity	No
Low switching hysteresis	Yes
Magnetic sensitivity	13.5 mT
Max. output current	25 mA
Number of switching outputs	2
Operating voltage	10 V ... 30 V
Reed contact	No
Reverse polarity protection	Yes
Sensor surface (active)	Middle area
Setting via teach-in	Yes
Short-circuit-proof	Yes


ELECTRICAL DATA

Suitable for safety functions	No
Two switching points	Yes
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage type	DC
With LED display	Yes
With monitoring function of downstream devices	No

OTHER DATA

Cylinder sensors	Yes
Cylinder version	With C-groove (round groove)
Harsh environmental conditions	No
Metallic sensor surface	No
Oil and cooling lubricants	No
Short travel path	No

CONNECTION

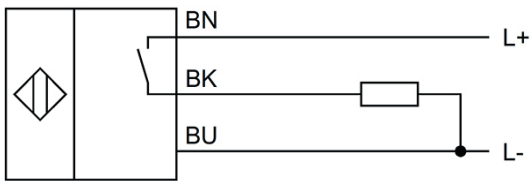

Colors: BN (brown), BU (blue), BK (black)

Functions: BN = L+, BU = L-, BK = PNP NO

DIMENSIONAL DRAWING

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!