


PTSIO255

LASER SENSORS • DISTANCE MEASUREMENT

Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

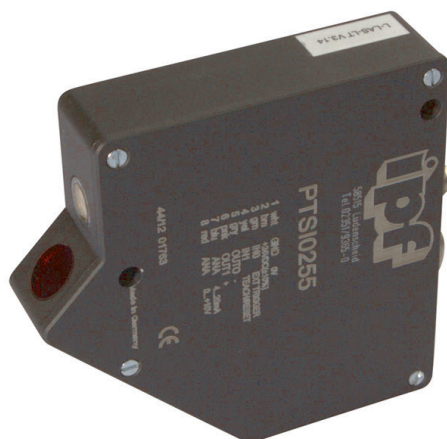

MECHANICAL DATA

Ambient temperature	-10 °C ... 50 °C
Degree of protection (IP)	IP54
Housing coating	Anodised
Housing design	Cuboid
Housing material	Aluminium
Material of optical surface	Glass
Sensor height	20 mm
Sensor length	82.26 mm
Sensor width	80 mm

ELECTRICAL DATA

Absolute linearity deviation	0.01 mm
IO-Link compatible	No
Max. output current	100 mA
Measuring method for optical distance measurement	Triangulation
Measuring range length	18.5 mm ... 22 mm
No-load current	100 mA
Number of pins	8
Number of switching outputs	2
Scanning function	Light-/dark-on mode
Scanning principle	Push button
Setting procedure	Parameterization
Standard for interfaces	RS-232
Supply voltage	21.6 V ... 26.4 V
Switching frequency	500 Hz
Type of analog output	0 V ... 10 V / 4 mA ... 20 mA
Type of electrical connection	Connector M9

ELECTRICAL DATA

Type of switching function	Normally closed contact/normally open contact
Type of switching output	PNP/NPN
Voltage type	DC

OPTICAL DATA

Geometrical resolution	0 mm
Laser protection class	Class 2
Light beam form	Line
Light source	Laser diode, red light
Light spot range	0.9 mm ²
Light spot range	0.9 mm ²
Light spot, laser focus	0.9 mm ²
Resolution	0 mm

OTHER DATA

Relative linearity deviation	0.2 %
------------------------------	-------

DIMENSIONAL DRAWING

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!