


Dimensions

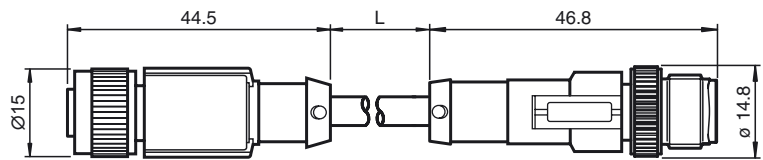

Model Number

V15B-G-2M-PUR-ABG-V15B-G

Bus cable PROFIBUS, M12 to M12, PUR cable

Features

- Shield attached to coupling nut
- Data transmission up to 12 Mbaud
- Identification sleeves
- Halogen-free

Technical data

General specifications

Number of pins	2 + shield
Transfer rate	max. 12 MBit/s
Connection 1	socket
Construction type 1	straight
Threading 1	M12
Connection 2	Male connector
Construction type 2	straight
Threading 2	M12

Electrical specifications

Operating voltage	U _B	max. 250 V
Operating current		max. 4 A
Volume resistance		≤ 5 mΩ


Ambient conditions

Ambient temperature	Cable, moving: -20 ... 80 °C (253 ... 353 K), Cable, fixed: -40 ... 80 °C (233 ... 353 K)
Pollution Degree	3

Mechanical specifications

Protection degree	IP65 / IP67/ IP69K	
Connection	5-pin M12 connector, B-coded	
Material		
Contacts	CuSn	
Contact surface	Ni/Au	
Body	TPU, black	
Cable	PUR	
Slotted nut	Zinc die-casting, nickel-plated	
Sleeve connector	Zinc die-casting, nickel-plated	
Seal	NBR	
Core insulation	PE	
Cable	2 cores with 2 fillers to the core	
Sheath diameter	Ø 7.8 mm	
Bending radius	> 10 x cable diameter, moving	
Color	violet	
Cores	2 x 0.25 mm ²	
Conductor construction	19 x 0.13 mm Ø	
Shield	grid tin-plated copper wires, 80 % covering	
Length	L	2 m
Mass		approx. 166 g

Electrical connection

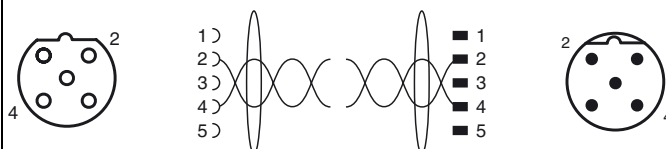

Release date: 2013-12-19 12:00 Date of issue: 2013-12-19 186243_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".