



**Model Number**

**V3-GM-BK5M-PUR-U-V3-GM**

Connection cable, M8 to M8, 3-pin, PUR cable

**Features**

- UL Recognized Component
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Flame resistant cable
- Resistant to microbes and hydrolysis
- Halogen-free
- Suitable for drag chains

**Accessories**


**MH V3-SCREWDRIVER**  
torque screwdriver (0.4 Nm)

**MH V3-BIT M8**  
plug-in cap for M8

**MH V3-Holder**  
Modular universal holder for M8 connectors

**V1/V3-LABEL**  
Label plate

**Dimensions**

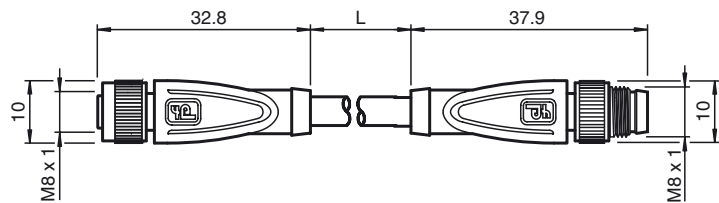

**Technical data**

**General specifications**

Number of pins	3
Connection 1	socket
Construction type 1	straight
Threading 1	M8
Connection 2	Male connector
Construction type 2	straight
Threading 2	M8
UL File Number	E231213

**Electrical specifications**

Operating voltage	$U_B$	max. 60 V DC
Operating current	$I_B$	max. 3 A
Volume resistance		< 5 m $\Omega$


**Ambient conditions**

Ambient temperature	-40 ... 90 °C (-40 ... 194 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F) cable, flexing: -20 ... 80 °C (-4 ... 176 °F)
Pollution degree	3

**Mechanical specifications**

Contact elements	spring-loaded contact socket
Pin diameter	1 mm
Degree of protection	IP67
Cable code	Li 9Y 11Y 3 x 0.34
Material	
Contacts	CuSn / Au
Contact surface	Au
Body	TPU, black
Cable	PUR
Slotted nut	Diecast zinc
Sleeve connector	Diecast zinc
Core insulation	PP
Cable	extra-fine wire, flexible
Sheath diameter	$\varnothing$ 4.3 mm
Bending radius	> 10 x cable diameter, moving > 5 x cable diameter, fixed
Color	black
Number of cores	3
Core cross-section	0.34 mm <sup>2</sup>
Conductor construction	42 x 0.1 mm $\varnothing$
Length	L 5 m
Drag chain suitability	
Drag chain cycles	$\geq$ 5000000
Motion velocity	$\leq$ 3.3 m/s
Acceleration	$\leq$ 5 m/s <sup>2</sup>

**Electrical connection**

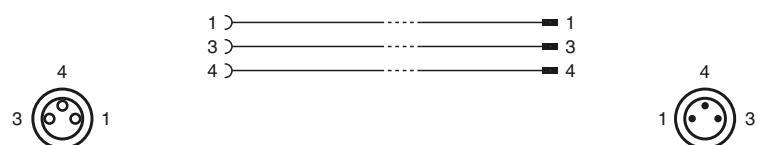

Release date: 2018-11-23 11:37 Date of issue: 2018-11-23 230060\_eng.xml



Torsional stress	± 180 °/m
Flammability	
Cable	FT2
<b>Approvals and certificates</b>	
UL approval	cURus AWM 20549 AWM I/II A/B 80°C 300V FT2 (cable)

Release date: 2018-11-23 11:37 Date of issue: 2018-11-23 230060\_eng.xml