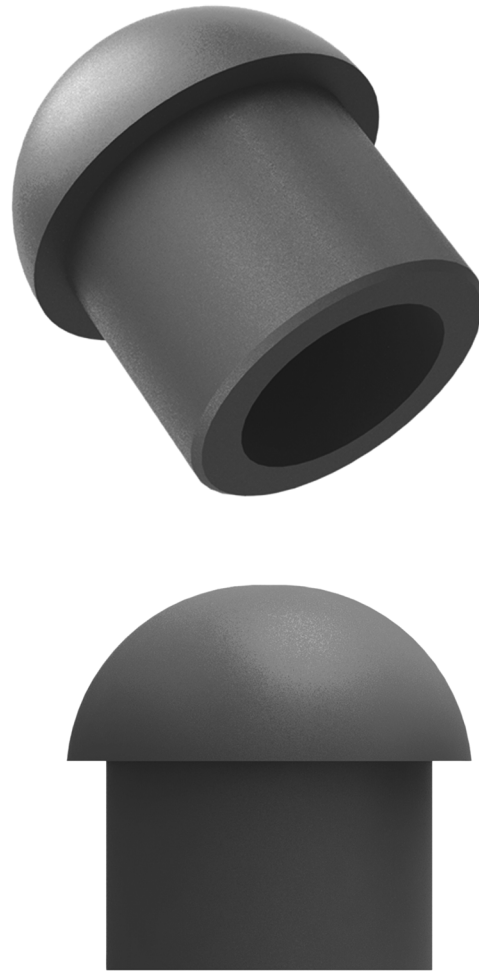


Features

- Sealing element for installation of cable glands in enclosures
- Accessory for CG.NA.* size M50 ... M63S / NPT1-1/2" ... NPT2S" cable glands metal
- Accessory for CG.EM.* size M63 / NPT2" cable glands metal
- Polyamide
- Ex e and Ex tb certified
- Suitable for operation in Zone 1, Zone 2, Zone 21 and Zone 22
- Packaging unit: 5 pieces, without accessories


Assembly**Technical data****Mechanical specifications**

Degree of protection	IP66 / IP68
Material	Polyamide (PA)
Finish	inherent color green
Mass	
Individual component	approx. 14 g
Packing unit	approx. 80 g
Dimensions	
Diameter (D)	37.8 mm
Outer diameter (DO)	50 mm
Length of pin (PL)	24 mm
Total length (L)	36 mm

Ambient conditions

Ambient temperature	-60 ... 70 °C (-76 ... 158 °F)
---------------------	--------------------------------

Data for application in connection with hazardous areas

EU-Type Examination Certificate	IMQ 14 ATEX 012X
Marking	 II 2 GD Ex e IIC Gb Ex tb IIIC Db

International approvals

IECEx approval	IECEx IMQ 14.0004X
----------------	--------------------

Conformity

Degree of protection	EN 60529
----------------------	----------

General information

Note	For exact reference to types and sizes of cable glands please refer to the specific datasheets
Delivery quantity	5

Scope of delivery

Sealing Plugs for metal Cable Glands
brief instructions (1 copy)

Supplementary information

EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com.**Dimensions**