

Features

- 1-channel signal conditioner
- 24 V DC supply (loop powered)
- Logic input 19 V DC ... 26.5 V DC, non-polarized
- Relay contact output for de-energized to safe function
- Test pulse immunity
- Up to SIL 3 acc. to IEC 61508
- Up to PL e acc. to EN/ISO 13849

Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits.


The device is a relay module that is suitable for safely switching applications of a load circuit. The device isolates load circuits up to 115 V and the 24 V control circuit.

The de-energized to safe (DTS) function is permitted for SIL 3 and PL e applications.

For testing of the relays, test terminals can be used. The test mode will be indicated by a LED.

The output is protected against contact welding by a fuse.

Assembly

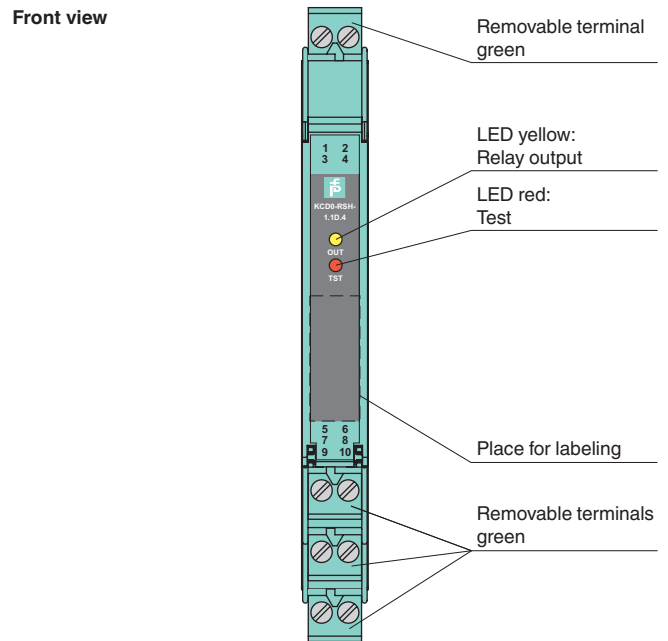


CE

SIL 3


PL e

Connection

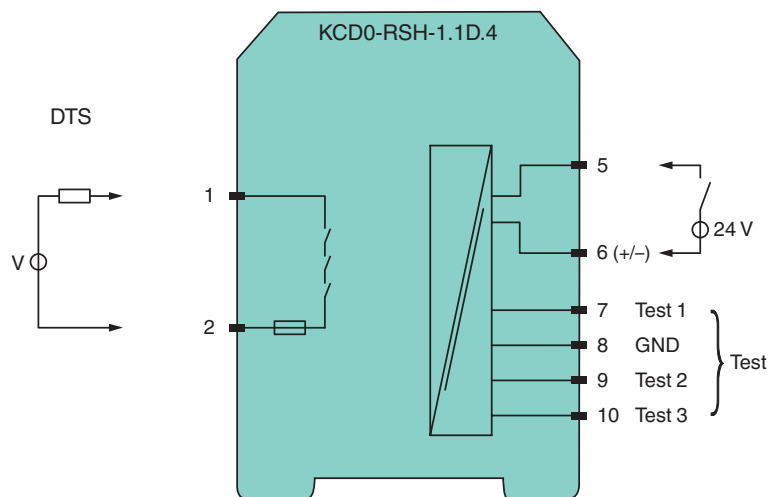


Zone 2
Div. 2

Release date 2017-11-15 12:23 Date of issue 2017-11-15 310311_eng.xml


General specifications	
Signal type	Digital Output
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 3
Performance level (PL)	PL e
Supply	
Connection	loop powered
Rated voltage U_r	19 ... 30 V DC loop powered
Power dissipation	< 1.3 W
Power consumption	< 1.3 W
Input	
Connection side	control side
Connection	Input terminals 5, 6 ; test input terminals 7, 8, 9, 10
Pulse/Pause ratio	150 ms / 150 ms
Test pulse length	≤ 4 ms from DO card
Test input	see Functional Safety Manual
Signal level	0-signal: -5 ... 5 V 1-signal: 19 ... 26.5 V
Rated current I_r	0-signal: typ. 1.6 mA at 1.5 V DC; typ. 8 mA at 3 V DC (maximum leakage current DO card) 1-signal: ≥ 36 mA (minimum load current DO card)
Output	
Connection side	field side
Connection	terminals 1, 2
Contact loading	125 V AC/3 A/cos φ 0.7; 30 V DC/3 A resistive load 125 V AC / 1/8 HP
Minimum switch current	10 mA / 24 V DC
Energized/De-energized delay	150 ms / 150 ms
Mechanical life	5 x 10 ⁶ switching cycles
Transfer characteristics	
Switching frequency	< 3 Hz
Galvanic isolation	
Input/Output	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Indicators/settings	
Display elements	LEDs
Labeling	space for labeling at the front
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Low voltage	
Directive 2014/35/EU	EN 61010-1:2010
Machinery Directive	
Directive 2006/42/EC	EN 62061:2005+AC:2010+A1:2013+A2:2015 , EN/ISO 13849-1:2015
Conformity	
Electromagnetic compatibility	NE 21:2012 , EN 61326-3-1:2008 , EN 61326-3-2:2008
Degree of protection	IEC 60529:2013
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F) Observe the temperature range limited by derating, see section derating.
Mechanical specifications	
Degree of protection	IP20
Connection	screw terminals
Mass	approx. 100 g
Dimensions	12.5 x 114 x 119 mm (0.5 x 4.5 x 4.7 inch) , housing type A2
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas	
Certificate	PF 15 CERT 3932 X
Marking	 II 3G Ex nC ec IIC T4 Gc [device in zone 2]
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-7:2015 , EN 60079-15:2010
International approvals	
UL approval	E106378
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Release date 2017-11-15 12:23 Date of issue 2017-11-15 310311_eng.xml


Derating

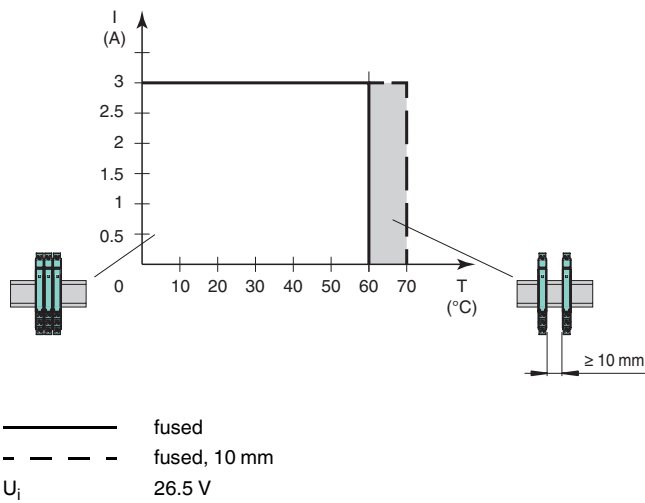

Derating for Zone 2 Application

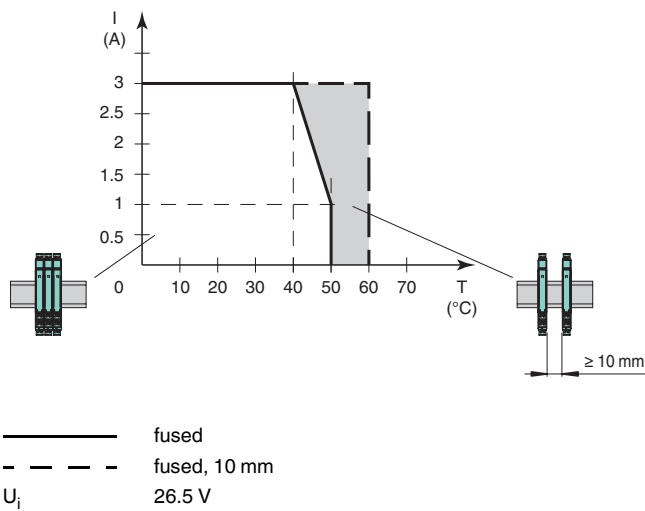

Maximum Switching Power of Output Contacts

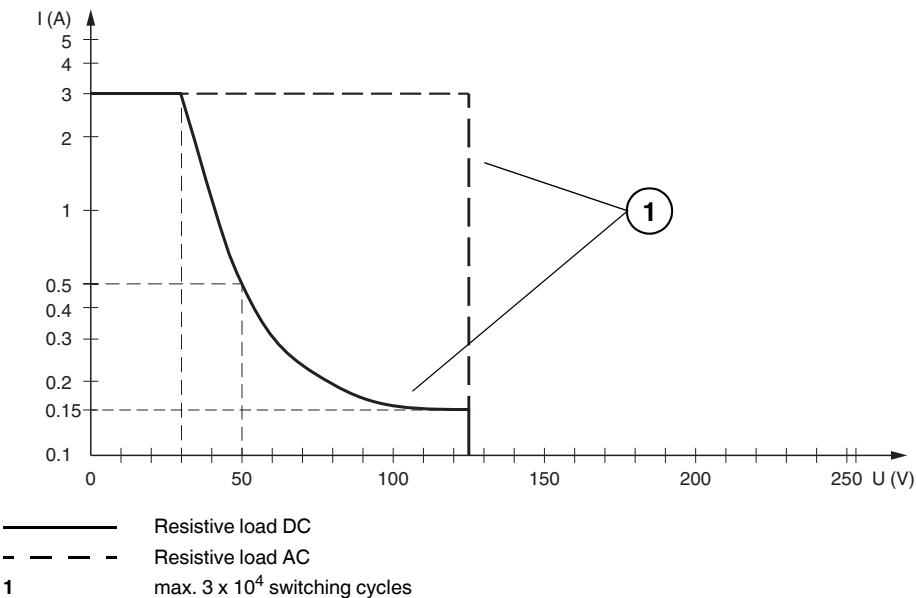

Release date 2017-11-15 12:23 Date of issue 2017-11-15 310311_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com