

Datasheet - SLC440-ER-0330-30-01

Safety light curtains, Safety light grids / Safety light curtains / SLC440



- Safety type 4 in accordance with IEC 61496-1
- User-friendly parameter setting, no tools required
- Reliable safety concept in case of interferences (EMC, welding sparks)
- Process safety with highest availability
- Integrated set-up tool

(Minor differences between the printed image and the original product may exist!)

Ordering details

| | |
|--------------------------|----------------------|
| Product type description | SLC440-ER-0330-30-01 |
| Article number | 101216736 |
| EAN Code | 4030661410104 |
| eCl@ss | 27-27-27-04 |

Approval


Approval



Classification

| | |
|------------------|---------------------------|
| Standards | EN ISO 13849-1, EN 62061 |
| PL | up e |
| Control category | up 4 |
| PFH value | 5.14 x 10 ⁻⁹ / |
| SIL | up 3 |
| Mission time | 20 Years |

Global Properties

| | |
|--|---------------------------------|
| Permanent light | SLC440 Sicherheits-Lichtvorhang |
| Standards | EN 61496-1; EN 61496-2 |
| Compliance with the Directives (Y/N)  | Yes |
| Operating resource protection class | Protection class 3 |
| Safety type in accordance with IEC 61496-1 | 4 |
| Materials | |
| - Material of the housings | Aluminium |
| Weight | 600 |
| Beam coding (Y/N) | Yes |
| Protection field height | 330 |
| Range of the protection field | 300 - 10.000 |
| Reaction time | 10 |
| Wave length of the sensors | 880 |
| Fade-out is possible (Y/N) | Yes |
| Override possible (Y/N) | No |
| reduced resolution (Y/N) | No |
| Clock control possible (Y/N) | No |
| Muting possible (Y/N) | No |
| Restart block (Y/N) | Yes |
| Master/slave function | No |
| Cascadable (Y/N) | No |
| Monitoring function of downstream devices (Y/N) | Yes |
| Recommended safety-monitoring module | SRB 301 |

Mechanical data

| | |
|-----------------------------------|----------------------------|
| Detection ability for test bodies | 30 |
| Number of beams | 16 |
| Design of electrical connection | Connector |
| - Wiring of the transmitter | connector plug M12, 4-pole |
| - Wiring of the receiver | connector plug M12, 8-pole |
| Cable length | 100 |

Ambient conditions

| | |
|--|----------------------|
| Ambient temperature | |
| - Min. environmental temperature | -25 |
| - Max. environmental temperature | +50 |
| Storage and transport temperature | |
| - Min. Storage and transport temperature | -25 |
| - Max. Storage and transport temperature | +70 |
| Protection class | IP67 to IEC/EN 60529 |

Electrical data

| | |
|---|---------|
| Design of output switching element OSSD | PNP |
| Power consumption | |
| - Power consumption Transmitter | < 5 |
| - Power consumption Receiver | < 10 |
| Voltage type | DC |
| Switching voltage of the OSSD in high state | 24 ± 10 |
| Integrated contactor control (Y/N) | Yes |

Outputs

Max. output current at secured output 250

Electrical data - Safety outputs

Number of secure semi-conductor outputs 2

Number of secure outputs with contact 0

LED switching conditions display

LED switching conditions display (Y/N) Yes

- Status and diagnostics Yes

- 7-segment display Yes

ATEX

Explosion protection categories for gases None

Explosion protected category for dusts None

Dimensions

Dimensions of the sensor

- Width of sensor 27.8

- Height of transmitter 411

- Height of Receiver 421

- Length of sensor 33

notice

In case of failure (interruption of the 0 V supply) the maximum leakage current is 1 mA.

Included in delivery

Delivery scope of disposable system Transmitter + receiver, Mounting angle

Indication legend

A: total length (Protection field height + 81 mm)

Ordering code

SLC440-ER(1)-(2)-01

(1)

0170 Protection field height 170 mm

0250 Protection field height 250 mm

0330 Protection field height 330 mm

0410 Protection field height 410 mm

0490 Protection field height 490 mm

0570 Protection field height 570 mm

0650 Protection field height 650 mm

0730 Protection field height 730 mm

| | |
|------|---|
| 0810 | Protection field height 810 mm |
| 0890 | Protection field height 890 mm |
| 0970 | Protection field height 970 mm |
| 1050 | Protection field height 1050 mm |
| 1130 | Protection field height 1130 mm |
| 1210 | Protection field height 1210 mm |
| 1290 | Protection field height 1290 mm <i>(Only for Resolution 30 mm, 50 mm)</i> |
| 1370 | Protection field height 1370 mm <i>(Only for Resolution 30 mm, 50 mm)</i> |
| 1450 | Protection field height 1450 mm <i>(Only for Resolution 30 mm, 50 mm)</i> |
| 1530 | Protection field height 1530 mm <i>(Only for Resolution 30 mm, 50 mm)</i> |
| 1610 | Protection field height 1610 mm <i>(Only for Resolution 30 mm, 50 mm)</i> |
| 1690 | Protection field height 1690 mm <i>(Only for Resolution 30 mm, 50 mm)</i> |
| 1770 | Protection field height 1770 mm <i>(Only for Resolution 30 mm, 50 mm)</i> |
| (2) | |
| 14 | Resolution 14 mm, Range 0,3 m ... 7 m |
| 30 | Resolution 30 mm, Range 0,3 m ... 10 m |

Documents

Operating instructions and Declaration of conformity (it) 627 kB, 15.04.2016

Code: mrl_slc440_it

Operating instructions and Declaration of conformity (de) 555 kB, 22.03.2016

Code: mrl_slc440_de

Operating instructions and Declaration of conformity (fr) 561 kB, 17.10.2018

Code: mrl_slc440_fr

Operating instructions and Declaration of conformity (pt) 554 kB, 17.10.2018

Code: mrl_slc440_pt

Operating instructions and Declaration of conformity (cn) 904 kB, 23.11.2018

Code: mrl_slc440_cn

Operating instructions and Declaration of conformity (nl) 650 kB, 31.07.2018

Code: mrl_slc440_nl

Operating instructions and Declaration of conformity (cs) 573 kB, 17.10.2018

Code: mrl_slc440_cs

Operating instructions and Declaration of conformity (pl) 727 kB, 20.06.2016

Code: mrl_slc440_pl

Operating instructions and Declaration of conformity (jp) 965 kB, 18.09.2017

Code: mrl_slc440_jp

Operating instructions and Declaration of conformity (es) 572 kB, 08.04.2016

Code: mrl_slc440_es

Operating instructions and Declaration of conformity (en) 564 kB, 22.03.2016

Code: mrl_slc440_en

BG-test certificate (en, de) 1 MB, 25.03.2015

Code: z_slcp03

Brochure (it) 2 MB, 01.03.2018

Code: b_optoshort_it

Brochure (pt) 2 MB, 26.10.2018

Code: b_optoshort_pt

Brochure (es) 2 MB, 23.10.2018

Code: b_optoshort_es

Brochure (fr) 2 MB, 20.11.2018

Code: b_optoshort_fr

Brochure (en) 2 MB, 23.10.2018

Code: b_optoshort_en

Brochure (pl) 2 MB, 03.08.2018

Code: b_optoshort_pl

Brochure (de) 2 MB, 22.10.2018

Code: b_optoshort_de

Brochure (pt) 1 MB, 12.04.2018

Code: b_slc440-familie_pt

Brochure (cn) 1 MB, 12.04.2018

Code: b_slc440-familie_cn

Brochure (de) 917 kB, 04.07.2018

Code: b_slc440-familie_de

Brochure (en) 1 MB, 04.07.2018

Code: b_slc440-familie_en

Brochure (fr) 1 MB, 12.04.2018

Code: b_slc440-familie_fr

Brochure (es) 1 MB, 12.04.2018

Code: b_slc440-familie_es

Brochure (nl) 1 MB, 04.07.2018

Code: b_slc440-familie_nl

Brochure (it) 1 MB, 12.04.2018


Code: b_slc440-familie_it

EAC certification (ru) 772 kB, 05.10.2015


Code: q_6395p17_ru

EAC certification (ru) 1 MB, 15.03.2018


Code: q_slbp01

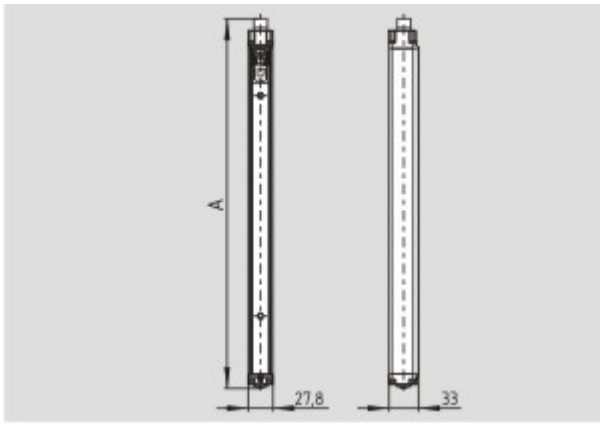

Dimensional drawing (basic component)

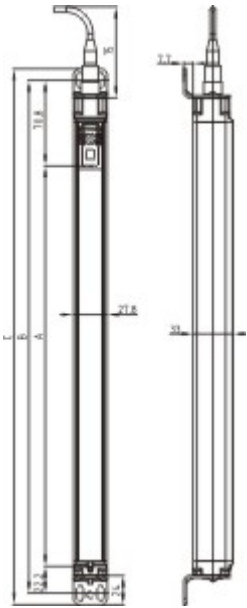

Dimensional drawing (basic component)

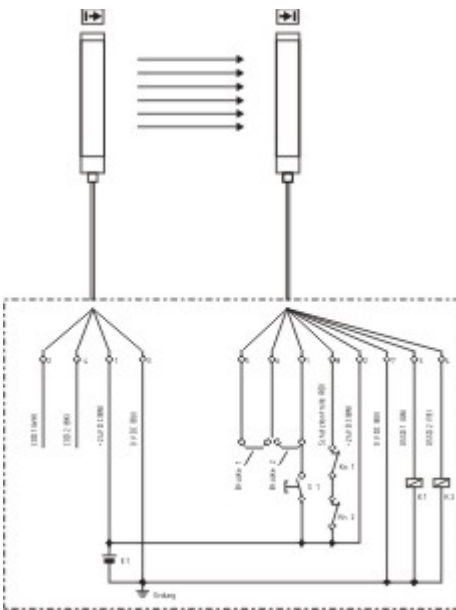

Wiring example

System components

Safety control modules



SRB 301MC

- Fit for signal evaluation of outputs of safety magnetic switches
 - 3 safety contacts, STOP 0
 - 1 Signalling output
 - Suitable for signal processing of outputs connected to potentials (AOPDs), e.g. safety light grids/curtains
 - Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks
-

Connector



KA-08

- for Transmitter
 - Pre-wired cable
 - 4-pole
 - for SLC/SLG
-



KA-09

- Pre-wired cable
 - 8-pole
 - for SLC/SLG
-

K.A. Schmersal GmbH & Co. KG, Möddinghofe 30, D-42279 Wuppertal

The data and values have been checked thoroughly. Technical modifications and errors excepted.

Generiert am 13.02.2019 - 14:19:16h Kasbase 3.3.0.F.64l