

Enabling Switch

S2DF002

Part Number



- Feedback (vibration signal and LED) upon approval
- One-hand operation thanks to ergonomic design
- Rubberized enabling switch


The 3-stage enabling switch is very well suited to extensive commissioning or service work thanks to the special design. The ergonomic design prevents fatigue and makes work easier.

Technical Data


Electrical Data	
Temperature Range	-5...60 °C
Mechanical Data	
Housing Material	Plastic
Service Life	1000000 Switching Cycles
Degree of Protection	IP54
Connection	Cable, 10-wire, 5 m
Safety-relevant Data	
B10d Switching Cycles	100 000
NO Contacts	2
Function	
3-stage	yes
Additional keys	+ / - key
Vibration signal	yes
Switching Status Indicator	yes
Connection Diagram No.	862
Control Panel No.	FP1
Suitable Mounting Technology No.	840

Complementary Products

Safety Relay SR4B3B01S, SR4D3B01S
Software

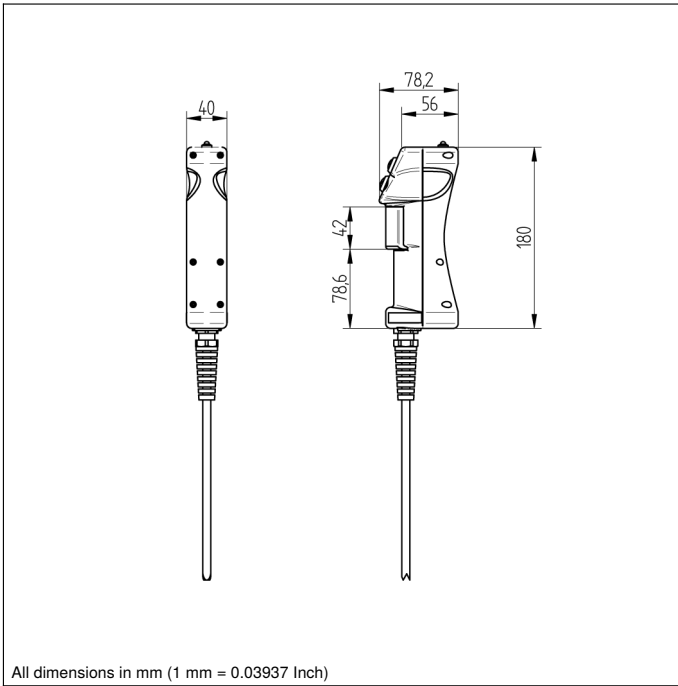

Ctrl. Panel



- 01 = Switching Status Indicator
- 24 = Plus Button
- 25 = Minus Button
- 93 = Confirmation key